
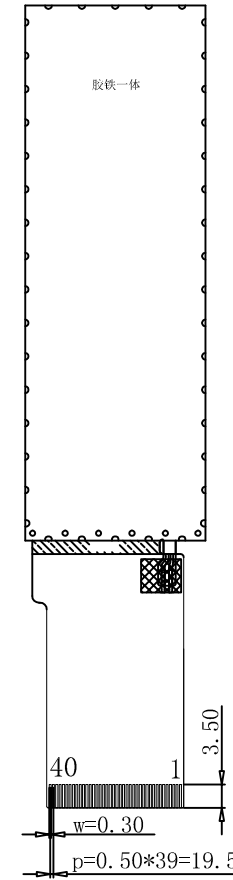


ROSH

| Reversion | Discription | Date         | Signed |
|-----------|-------------|--------------|--------|
| 01        | First       | 2022. 12. 19 | YP     |
|           |             |              |        |

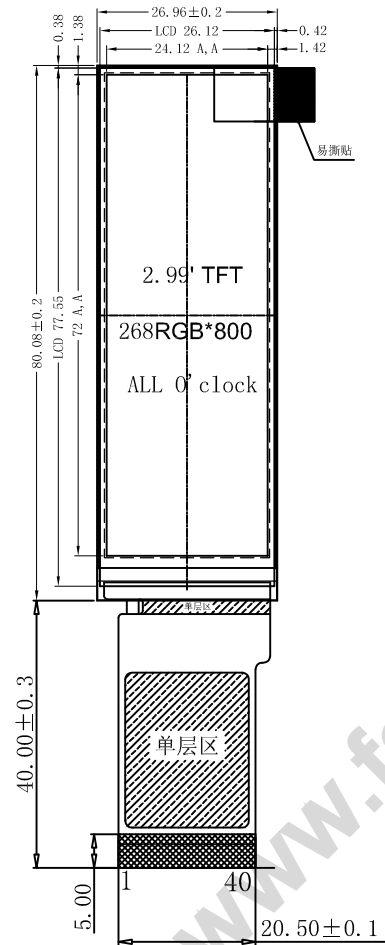


| No | PIN NAME  |
|----|-----------|
| 1  | LEDA      |
| 2  | LEDK      |
| 3  | LEDK      |
| 4  | GND       |
| 5  | VCC(3.3V) |
| 6  | RESET     |
| 7  | NC        |
| 8  | NC        |
| 9  | SDA       |
| 10 | SCL       |
| 11 | CS        |
| 12 | DCLK      |
| 13 | DE        |
| 14 | VS        |
| 15 | HS        |
| 16 | DB0 B0    |
| 17 | DB1 B1    |
| 18 | DB2 B2    |
| 19 | DB3 B3    |
| 20 | DB4 B4    |
| 21 | DB5 B5    |
| 22 | DB6 G0    |
| 23 | DB7 G1    |
| 24 | DB8 G2    |
| 25 | DB9 G3    |
| 26 | DB10 G4   |
| 27 | DB11 G5   |
| 28 | DB12 R0   |
| 29 | DB13 R1   |
| 30 | DB14 R2   |
| 31 | DB15 R3   |
| 32 | DB16 R4   |
| 33 | DB17 R5   |
| 34 | GND       |
| 35 | TPINT/NC  |
| 36 | TPSDA/NC  |
| 37 | TPSCL/NC  |
| 38 | TPRET/NC  |
| 39 | TPVCC/NC  |
| 40 | GND       |

3SPI+18RGB

NOTES:

- DISPLAY TYPE: 2.99" TFT, TRANSMISSIVE
- DRIVER IC:ST7701S
- VIEWING DIRECTION: ALL'Clock
- BACKLIGHT: 6 pcs White LED
- INPUT CURRENT: VCC 2.8V(type)
- OPERATING TEMP: -20° C~ +70° C
- STORAGE TEMP: -30° C~ +80° C
- UNDEFINED DIMENSION TOLERANCE: ±0.2mm
- RoHS COMPLIABLY



倍顯(香港)有限公司  
Facelcd(HongKong) Limited

| Customer Ref. | Model No. | Drawing Title | FB030ESS507-A      |              |        |        |  |
|---------------|-----------|---------------|--------------------|--------------|--------|--------|--|
| ---           | Approve   | Material      | Unmarked Tolerance | Unit         | Scale  | Page   |  |
| ---           | Checked   | LCM           | ±0.2               | mm           | --     | 1 of 1 |  |
| Drawing No.   | Draw      | YP            | Date               | 2022. 12. 19 | Rev 00 |        |  |
| ---           |           |               |                    |              |        |        |  |