
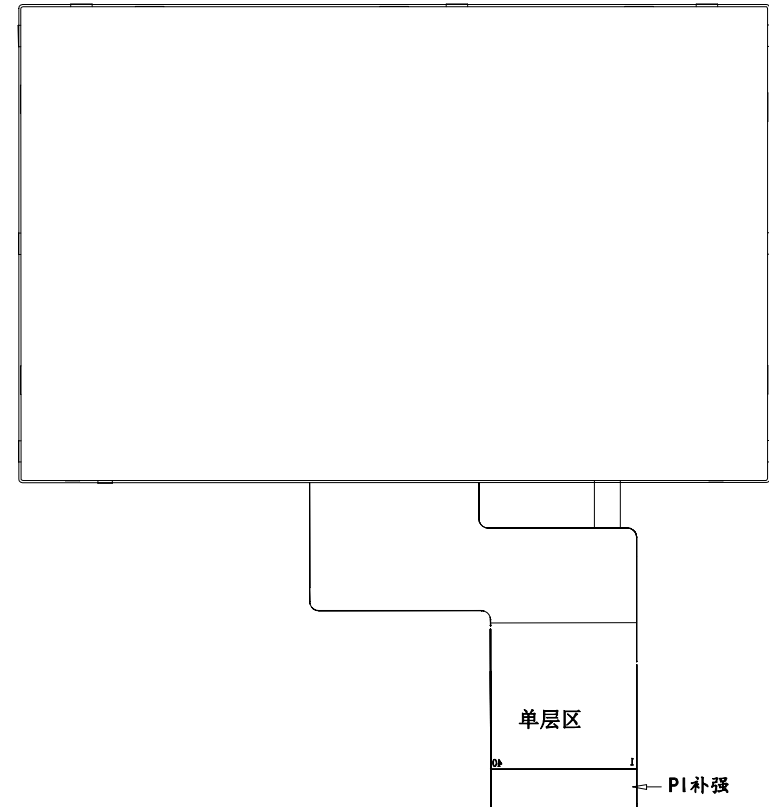
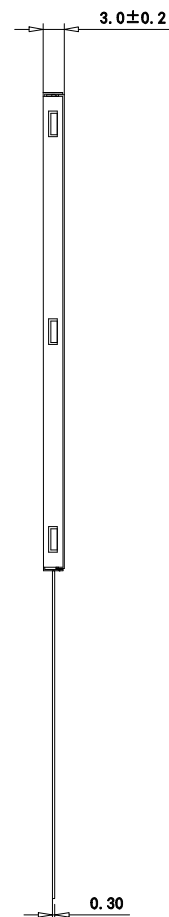


B/L CIRCUIT DIAGRAM

No	PIN NAME
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

1. DISPLAY TYPE	TFT/NEGATIVE	Approve	
2. VIEWING DIRECTION	ALL		
3. DRIVER IC			
4. LED VOLTAGE	15V(40mA)	Checked	
5. OPERATIVE VOLTAGE	3.3V		
6. OPERATIVE TEMP.	-20° C TO 70° C	Drawn	
7. STORAGE TEMP.	-30° C TO 80° C		
8. CONNECTOR	FPC	Approved	

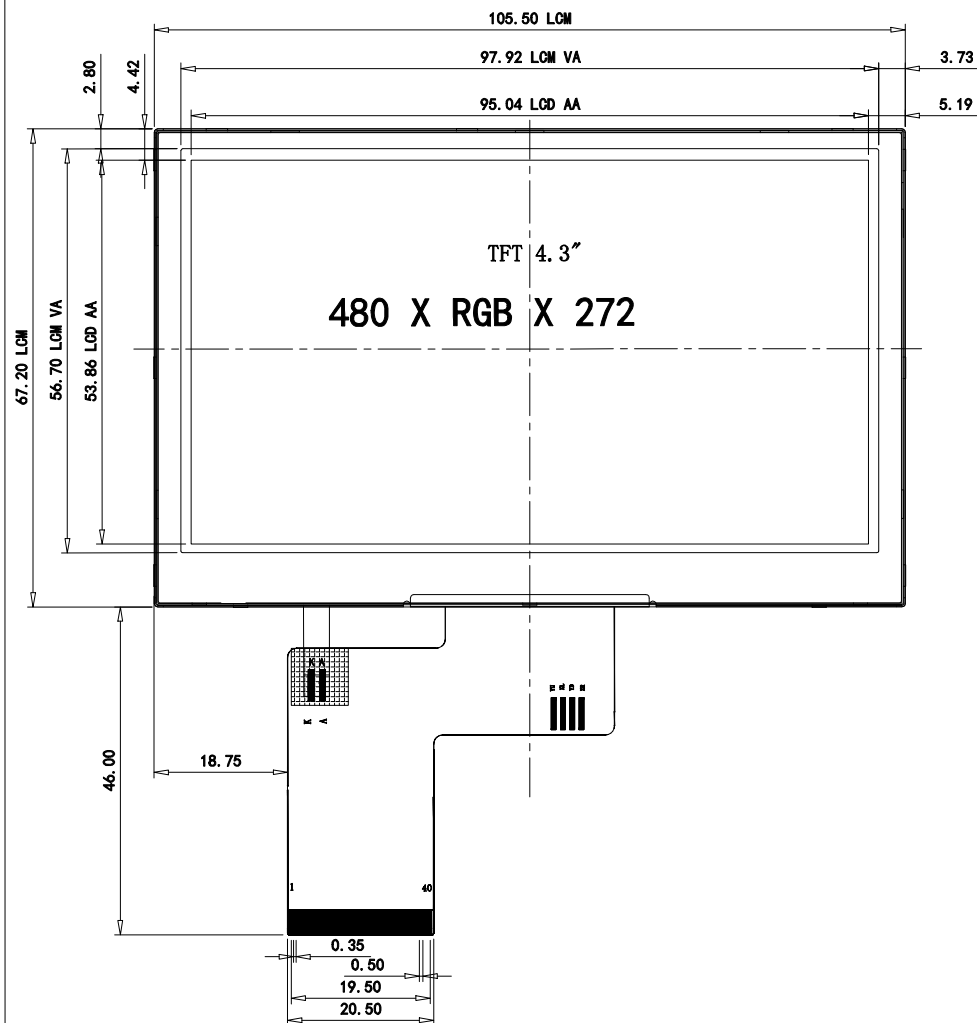

倍顯(香港)有限公司
Facelcd(HongKong) Limited

Dwg.No

FB043XSG401-B

Unmarked Tolerance	±0.2
Unit	mm
Version	A.0
Date	
Page	4/10
	1.0