



☐ Preliminary Specification
☒ Final Specification

Customer Approve:

QC 品质 : _____

R&D 研发 : _____

Approved 批准: _____

产品型号(Description): FB090MFV600-A

Compile by 编制	Quality/Engineer 品质/工程	Checked 审核	Approved 批准



REVISION RECORD

REV NO	REV DATE	CONTENTS	REMARKS
V.0	2023-11-18	First Release	



Table of contents

1.0	General Description.....	4
2.0	Absolute Maximum Ratings.....	5
3.0	Optical Characteristics.....	6
4.0	Power On/Off Sequence.....	9
5.0	Electrical Characteristics.....	11
6.0	Reliability Test Items.....	17
7.0	Interface Pin Connection.....	18
8.0	Outline Dimension.....	20
9.0	Package specification.....	21
10.0	General Precaution.....	22



1.0 General description

1.1 Introduction

FB090MFV600-A is model a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 10.1 (16:9) inch diagonally measured active display area with 720p(1280 horizontal by 720 vertical pixel array) resolution. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.

1.2 Features

- 4 lanes LVDS Interface
- Data enable signal mode
- 8-bit color depth, display 16.7M colors
- Low driving voltage and low power consumption
- ROHS Compliant

1.3 General information

Item		Specification	Unit	Remarks
Outline Dimension		210.7(H) x 126.5(V) x 4.9(body)	mm	Tolerance: ± 0.3 mm
Display area		198.912(W) x 111.888(H)	mm	
Number of Pixel		1280(H) x RGB x 720(V)	pixels	
Pixel pitch		0.1554(H) x 0.1554(V)	mm	
Pixel arrangement		Pixels RGB stripe arrangement		
Display mode		Normally Black		
Surface treatment		IPS Film		
Weight		TBD (Typ.)	gram	
Back-light		Single LED (Side-Light type)		
Power Consumption	B/L System	2.856(Max.)	watt	
Driver IC		*EK79202		*Using IC
Polarizer		Up: 0° sand surface Down 90° smooth surface	pcs	

1.4 Mechanical Information

Item		Min.	Typ.	Max.	Unit
Module Size	Horizontal(H)	210.5	210.7	210.9	mm
	Vertical(V)	126.3	126.5	126.7	mm
	Depth(D)	4.6	4.9	5.2	mm



2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Electrical Absolute Rating (GND=AGND=0V)

Parameter	Symbol	Spec.			Unit	Note
		Min.	Typ.	Max.		
Interface Supply Voltage	IOVCC	-0.3	-	+3.6	V	
Logic Supply Voltage	VCI	-0.3	-	+6.6	V	
Analog Supply Voltage	VCIP	-0.3	-	+6.6	V	
High speed interface Supply Voltage	VCCH	-0.3	-	+6.6	V	
Positive Voltage input	AVDD	-0.3	-	AVDD+ 0.5	V	
Negative Voltage input	AVEE	0	-	-6.6	V	
Power Supply Voltage	VGH	-0.3	-	+25	V	
Power Supply Voltage	VGL	0	-	-16	V	
Operation Temperature	TOPR	-30	-	+80	°C	
Storage Temperature	TSTG	-30	-	+80	°C	

Note: (1) All of the Voltages listed above are with respect to GND=0V.

2.2 TFT LCD Power Supply Voltage

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power Supply Voltage	DVDD	3.2	3.3	3.4	V
	VGH	16.5	17.5	18.5	V
	VGL	-12.5	-11.5	-10.5	V
Power Supply Current	IDVDD	120	160	200	mA



2.3 Back-light Unit

Parameter	Symbol	Min	Typ	Max.	Unit	Note
LED Current	I_L	180	240		mA	Ta=25°C
LED Voltage	V_L	16.8	18	19.2	V	Ta=25°C
LED Life-time	h	30000	-	-	V	Ta=25°C, If=60mA

2.4 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	Topa	-30	80	°C	
Storage Temperature	Tstg	-30	80	°C	



3.0 OPTICAL CHARACTERISTICS

3.1 Optical Specifications

Item	Symbol	Temp	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle range	Horizontal	θ_{L}	CR > 10	75	85	--	Deg	Note (1,2)
		θ_{R}		75	85			
	Vertical	θ_{U}		75	85	--	Deg	
		θ_{D}		75	85			
Luminance Contrast ratio		CR	$\theta = 0^{\circ}$	900	1200	--	--	Note (1,2)
Brightness		Y			550	--	Cd/cm2	Note (4,5)
Transmittance		T(%)	$\theta = 0^{\circ}$	--	4.1	--	%	
Color Gamut (C light)				--	70	--	%	
Reproduction of color (C-light)	White	Xw	$\theta = 0^{\circ}$	-0.03	0.275	+0.03		Note (1,4)
		Yw			0.275			
	Red	Rx			0.637			
		Ry			0.340			
	Green	Gx			0.303			
		Gy			0.604			
	Blue	Bx			0.173			
		By			0.068			
Response Time (Rising + Falling)	Trt		Ta= 25° C $\theta = 0^{\circ}$	--	30	40	ms	Note (1,3)
Opetical View Direction			ALL					Note (1)

3.2 Measuring Condition

Measuring surrounding: dark room


Ambient temperature: 25±2°C

15min. warm-up time.

3.3 Measuring Equipment

FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-7 for other optical characteristics. Measuring spot size: 20 ~ 21 mm

Note (1) Definition of Viewing Angle :

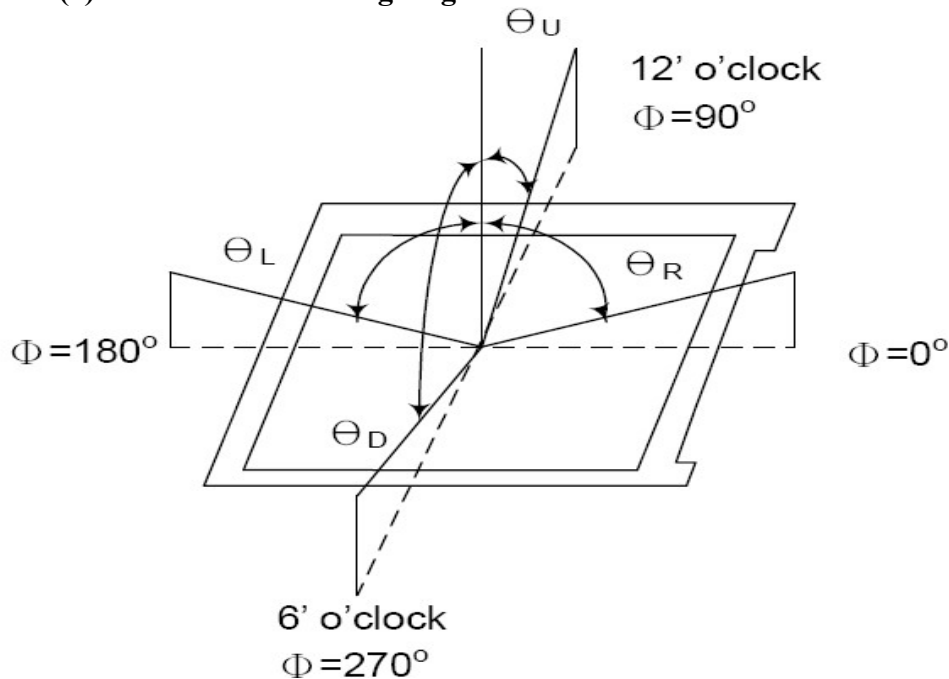


Note (2) Definition of Contrast Ratio (CR):


Measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$


Note (3) Definition of Response Time: Sum of TR and TF

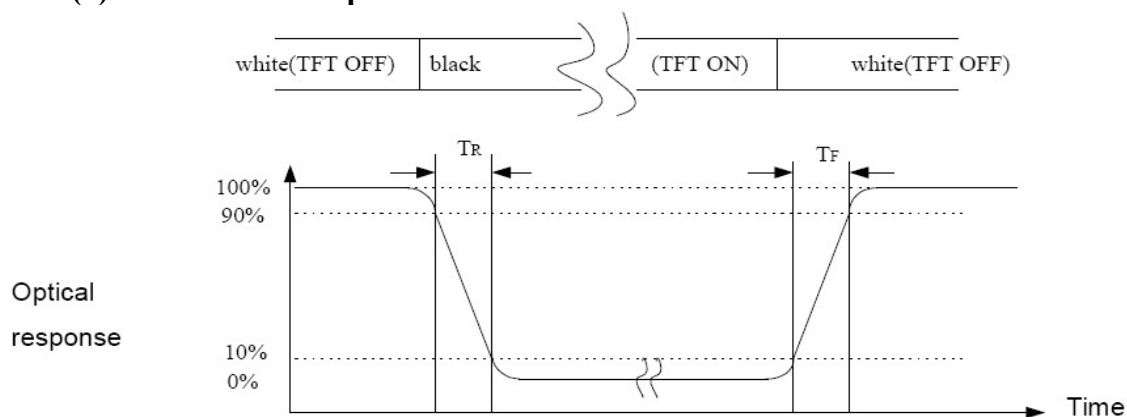

Note (4) Definition of optical measurement setup

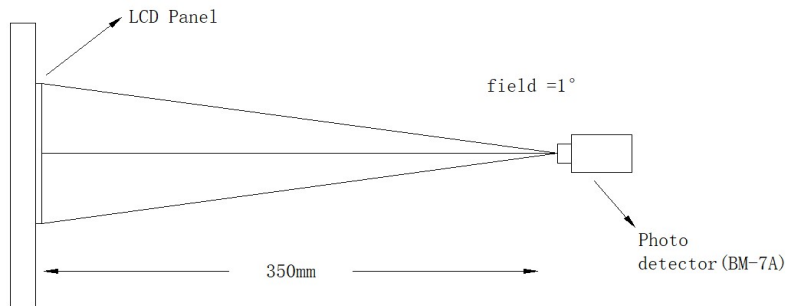

Note (5) Definition of brightness uniformity

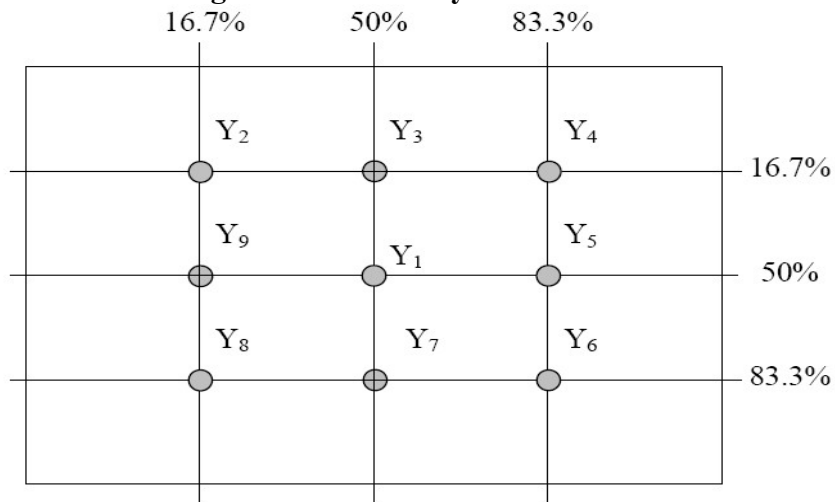


$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$




4.0 Power On/Off Sequence

To prevent the device damage from latch up, the power on/off sequence shown Below must be followed.

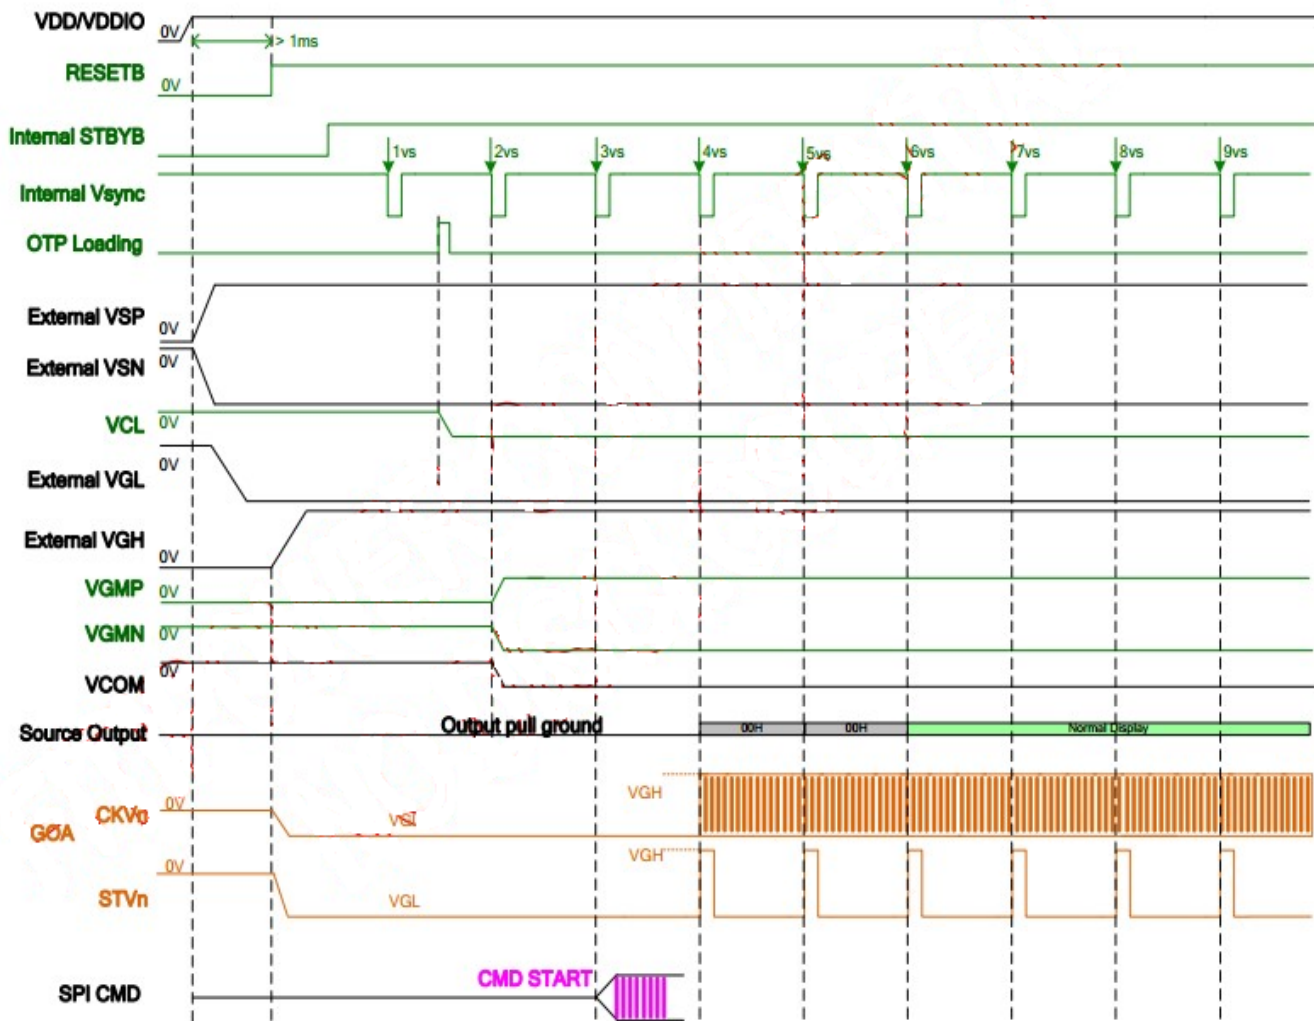

Power on sequence

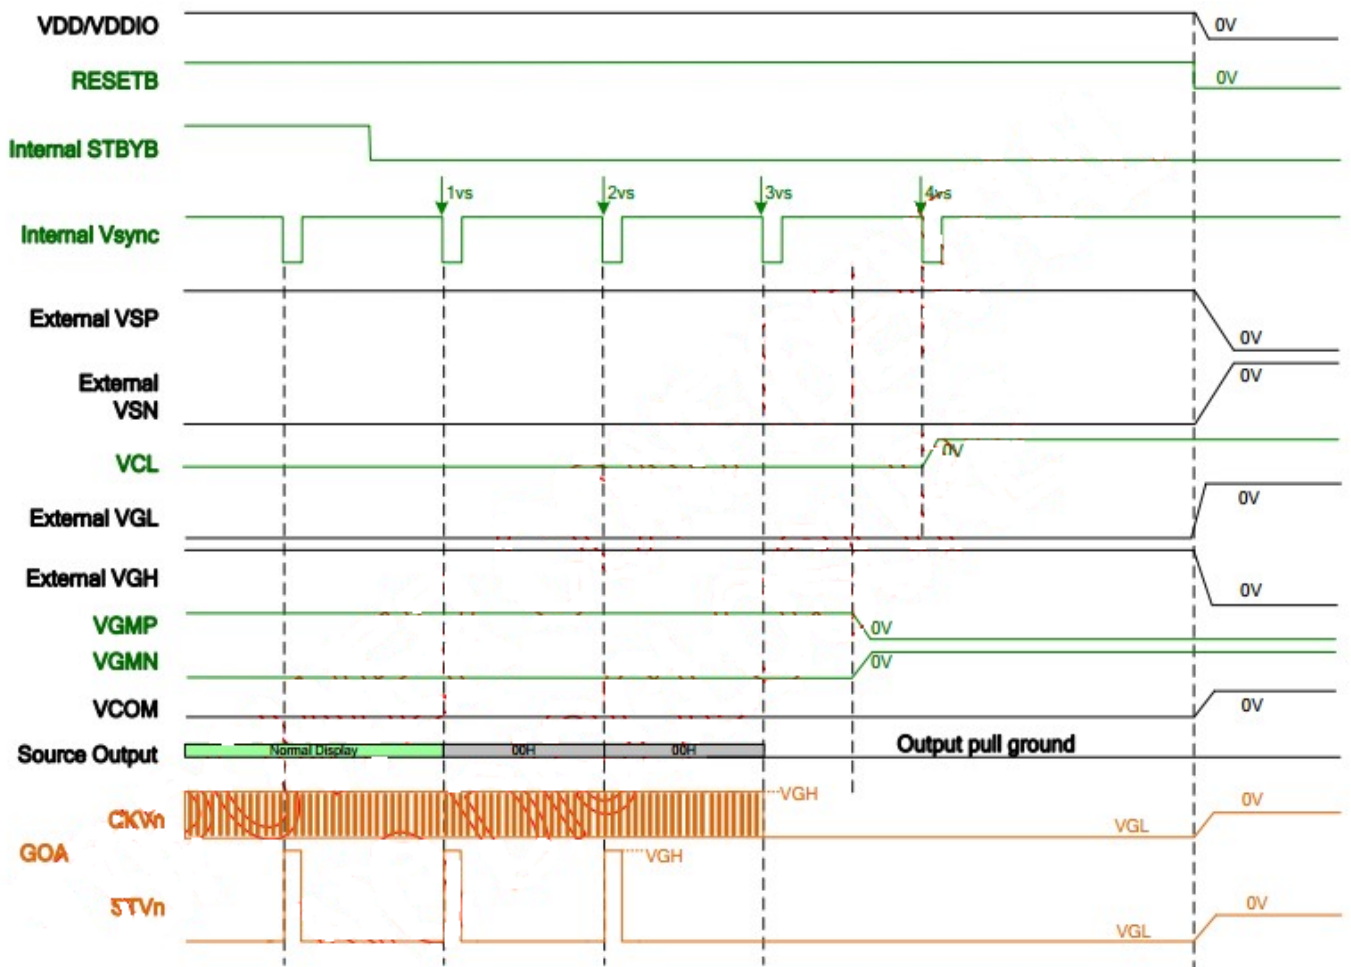

Power off sequence



5.0 ELECTRICAL CHARACTERISTICS

5.1 DC characteristics

(Test condition: VDD=VDDIO=VDDIF=2.3~3.6V, TA=-20℃~+85℃, VSS=VSSA=0V)


Parameter		Symbol	Spec.			Unit	Note
			Min.	Typ.	Max.		
VDDIO Input high level voltage		VIH	0.8 x VDDIO		VDDIO	V	
VDDIO input low level voltage		VIL	VSS		0.2 x VDDIO	V	
Input Leakage Current		Ileak	(-1)		(+1)	μA	
VGH_REG output voltage		VGH_REG	9	16	22	V	
VGL_REG output voltage		VGL_REG	-15	-10	-4.5	V	
VGMP output voltage		VGMP	3.5	4.24	5.8	V	
VGMN output voltage		VGMN	-5.8	-4.64	-3.5	V	
VGL output voltage		VGL	-17	-12	-6	V	
VGH output voltage		VGH	11	18	24	V	
VCL output voltage		VCL	-3	-2.8	-2.1	V	
VCOM output voltage		VCOM	-2.405	-1.5	-0.5	V	
Input terminal resistance		ZID		100		ohm	
Source output level deviation	Graycode = 0 ~ 14			TBD		mV	
	Graycode = 241 ~ 255			TBD		mV	
	Graycode = 15 ~ 31			TBD		mV	
	Graycode = 208 ~ 240			TBD		mV	
Source output offset deviation	Graycode = 32 ~ 207			TBD		mV	
	Graycode = 0 ~ 14	-		TBD		mV	
	Graycode = 241 ~ 255	-		TBD		mV	
	Graycode = 15 ~ 31	-		TBD		mV	
Current consumption	Graycode = 208 ~ 240	-		TBD		mV	
	Graycode = 32 ~ 207	-		TBD		mV	
Current consumption	Analog Operating	IAOP		TBD		mA	
	Analog Stand-by	IAST		TBD		mA	
Rush current		Ivddpeak		TBD		mA	



(VDD=VDDIO=VDDIF=2.3 to 3.6V, VSS=VSSA=VSS_IF=0V, TA=-20 to +85°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Differential input high threshold voltage	R_{XVTH}	+0.1	0.2	0.3	V	$R_{XVCM}=1.2V$
Differential input low threshold voltage	R_{XVTL}	-0.3	-0.2	-0.1	V	
Input voltage range (singled-end)	R_{XVIN}	0.7	-	1.7	V	
Differential input common mode voltage	R_{XVCM}	1	1.2	1.4	V	$ V_{ID} =0.2$
Differential input impedance	Z_{ID}	80	100	125	ohm	
Differential input voltage	$ V_{ID} $	0.2	-	0.6	V	
Differential input leakage current	I_{LCLVDS}	-10	-	+10	uA	
LVDS Digital Operating Current	$I_{VDDMIPI}$	-	15	20	mA	$F_{DCLK}=80MHz, VDD=3.3V$, Input pattern: 55h->Aah->55h->Aah
LVDS Digital Stand-by Current	I_{STMIPI}	-	-	250	uA	Clock & all Functions are stopped


Single-end Signals

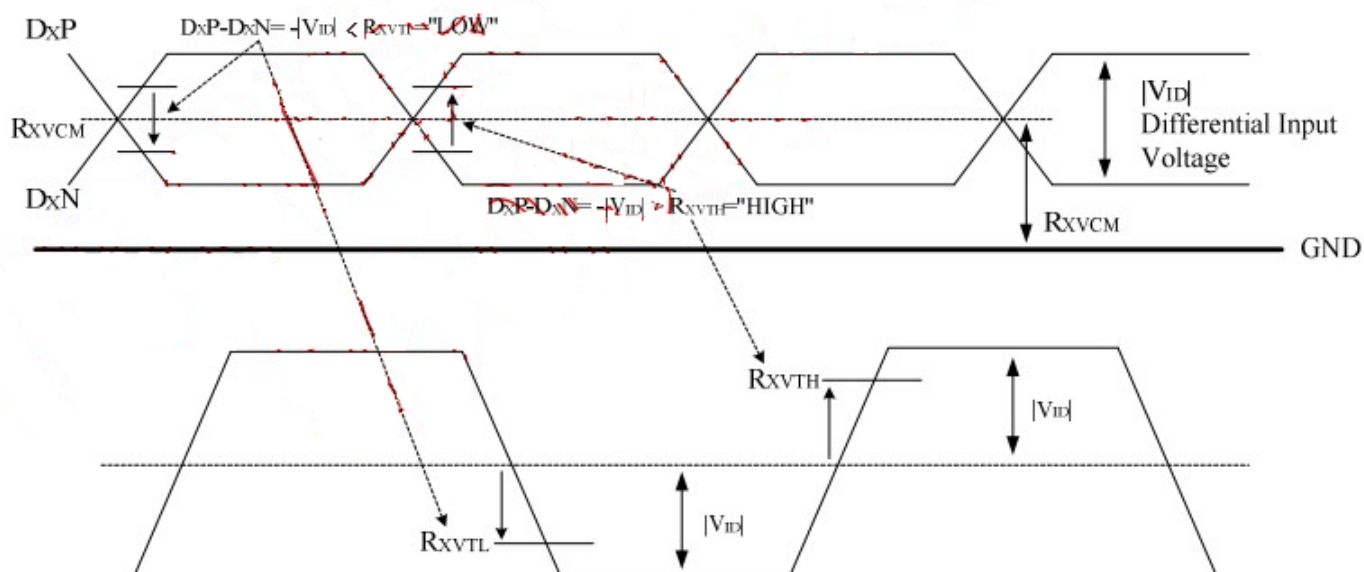





5.2 LVDS AC characteristics

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
Clock frequency	R_{xFCLK}	30	-	TBD	MHz	Refer to input timing table for each display resolution
Input data skew margin	T_{RSKM}	500	-	-	ps	$ VID = 200mV$ $RxVCM = 1.2V$ $RxFCLK = 81MHz$
Clock high time	T_{LVCH}	-	$4/(7 * R_{xFCLK})$	-	ns	
Clock low time	T_{LVCL}	-	$3/(7 * R_{xFCLK})$	-	ns	
PLL wake-up time	T_{enPLL}	-	-	150	us	

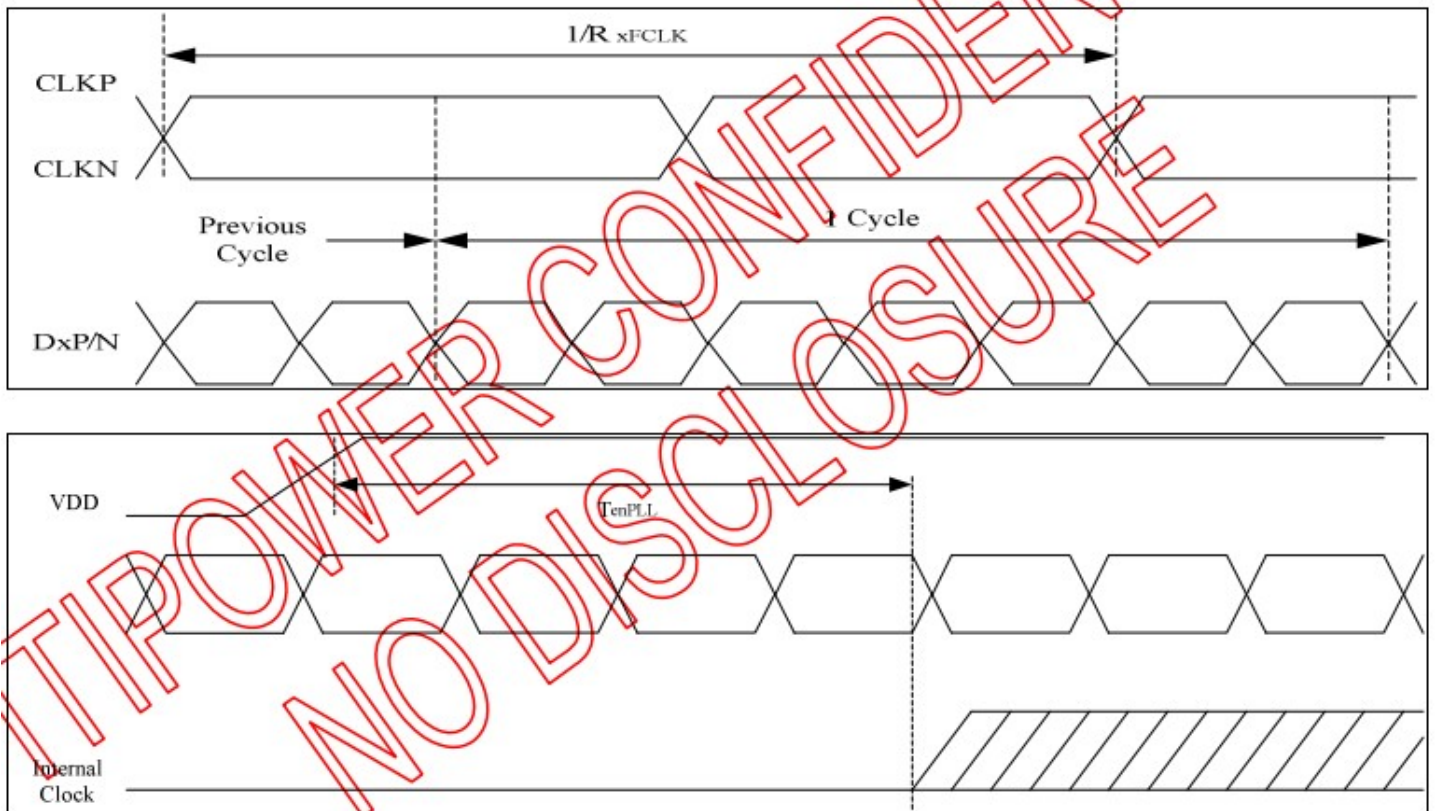

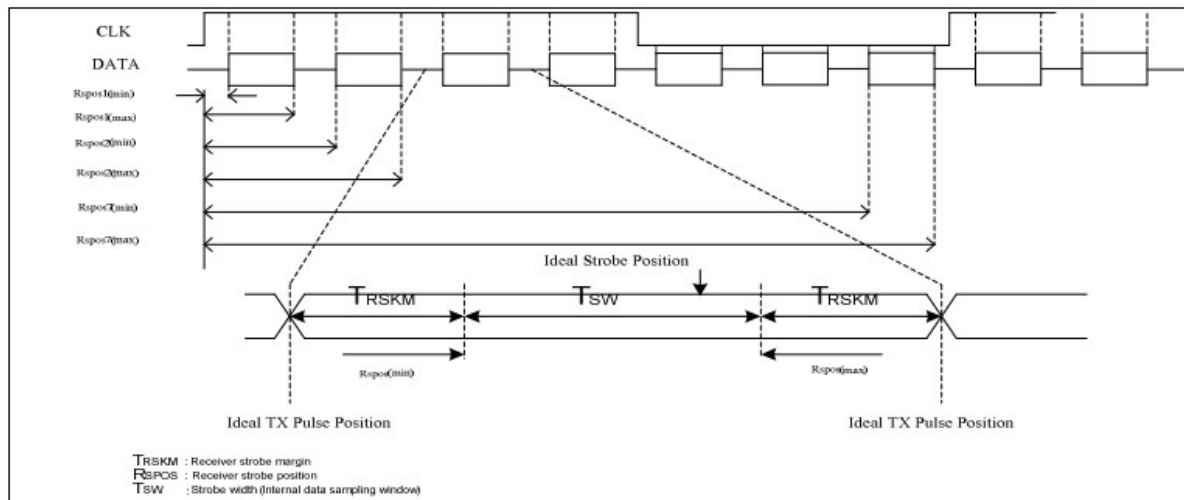


5.3 OUTPUT TIMING

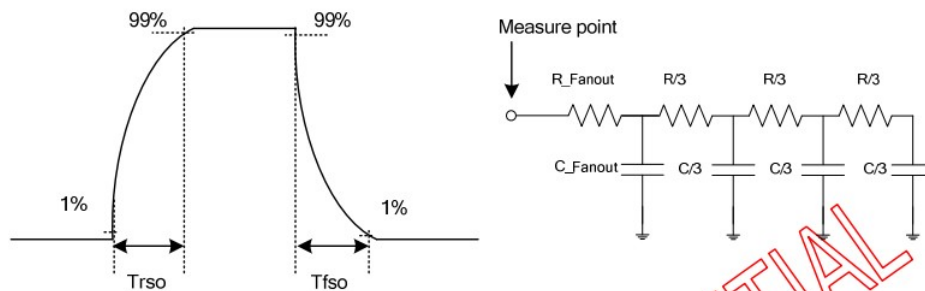

Rdata_total = 25.072k(ohm)
Cdata_total = 83 pF

Parameter	Symbol	Condition	Spec.			Unit
			Min.	Typ.	Max	
Source driver rising time	Trso			3.52		μs
Source driver falling time	Tfso			2.8		μs

Panel control signal output (GOUTL[1]~GOUTL[22] , GOUTR[1]~GOUTR[22])

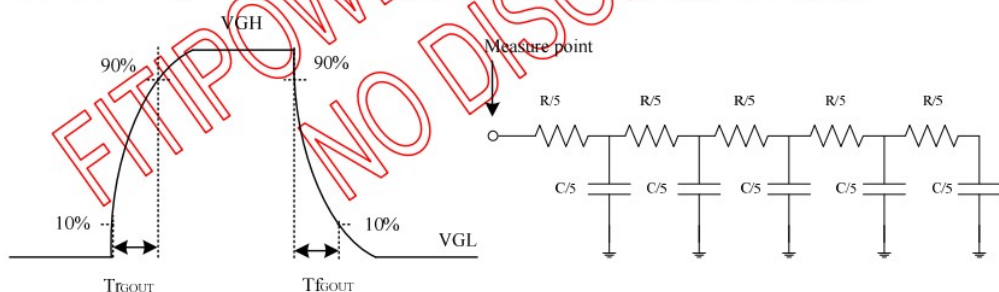

Parameter	Symbol	Condition	Spec.			Unit
			Min.	Typ.	Max	
Panel control signal rising time	TrGOUT	TBD	-	-	TBD	μs
Panel control signal falling time	TfGOUT	TBD	-	-	TBD	μs



Parameter	Symbol	Min.	Typ.	Max	Unit	Note
Horizontal Display Area	thd	1280			DCLK	
DCLK frequency	fclk	-	66.2	-	MHz	
HSD Period	th	-	1320	-	DCLK	
HS pulse width	thpw	-	2	-	DCLK	
HS Back Porch(Blanking)	thbp	23			DCLK	
HS Front Porch	thfp	-	15	-	DCLK	

Parameter	Symbol	Min.	Typ.	Max	Unit	Note
Vertical Display Area	tvb	720			T _H	
VS period time	tv	-	890	-	T _H	
VS pulse width	tvpw	-	10	-	T _H	
VS Back Porch(Blanking)	tvbp	88			T _H	
HS Front Porch	tvfp	-	72	-	T _H	

6.0 Reliability test items

Test Item	Test Conditions	Notes
High temperature Operation	Ta= +80℃, 240hrs	
Low temperature Operation	Ta= -30℃, 240hrs	
High Temperature Storage	Ta= +80℃, 240hrs	
Low Temperature Storage	Ta= -30℃, 240hrs	
Humidity Test	60℃ ,Humidity 90% ,240hrs	
Thermal Shock Test	-30℃,30min ~ +80℃,30min (30 cycle)	
Vibration Test(Packing)	Sine Wave 2G, 10Hz~55Hz~10Hz, XYZ 2 hours/each direction	
Static Electricity	Contact: ±4KV; Air: ±8KV (R=330Ω , C=150pF) , 1sec, 9point, 10times/point	



7.0 INTERFACE PIN CONNECTION

Signal of interface

Terminal No.	Symbol	I/O	Functions
1	AGND	P	Analog Ground
2	NC	I	No connection
3	DVDD	P	Power for Digital Circuit
4	GND	P	Ground
5	NC	I	No connection
6	DVDD	P	Power for Digital Circuit
7	GND	P	Ground
8	NC	I	No connection
9	NC	I	No connection
10	NC	I	No connection
11	NC	I	No connection
12	NC	I	No connection
13	NC	I	No connection
14	NC	I	No connection
15	GND	P	Ground
16	DVDD_LVDS	P	LVDS Power
17	GND	P	Ground
18	RXIN3+	I	Positive LVDS differential data inputs
19	RXIN3-	I	Negative LVDS differential data inputs
20	GND	P	Ground
21	RXCLKIN+	I	Positive LVDS differential clock inputs
22	RXCLKIN-	I	Negative LVDS differential clock inputs
23	GND	P	Ground
24	RXIN2+	I	Positive LVDS differential data inputs
25	RXIN2-	I	Negative LVDS differential data inputs
26	GND	P	Ground
27	RXIN1+	I	Positive LVDS differential data inputs
28	RXIN1-	I	Negative LVDS differential data inputs
29	GND	P	Ground
30	RXIN0+	I	Positive LVDS differential data inputs
31	RXIN0-	I	Negative LVDS differential data inputs
32	GND	P	Ground
33	GND_LVDS	P	LVDS Ground
34	RESET	I	Global reset pin.
35	STBYB	I	Standby mode,normally pull high STBYB="1", normally opration STBYB="0", timing control,source driver will turn off
36	L/R	I	Left / right selection
37	DVDD	P	Power for Digital Circuit
38	NC	I	No connection
39	AGND	P	Analog Ground
40	NC	I	No connection
41	NC	I	No connection
42	NC	I	No connection



43	GND	P	Ground
44	DVDD	P	Power for Digital Circuit
45	GND	P	Ground
46	NC	I	No connection
47	NC	I	No connection
48	NC	I	No connection
49	NC	I	No connection
50	NC	I	No connection
51	GND	P	Ground
52	NC	I	No connection
53	GND	P	Ground
54	DVDD	P	Power for Digital Circuit
55	SELB	P	6bit/8bit mode select SELB="1", input data is 8bit, SELB="0", input data is 6bit,
56	VGH	P	Gate ON Voltage
57	DVDD	P	Power for Digital Circuit
58	VGL	P	Gate OFF Voltage
59	GND	P	Ground
60	BIST_NC	N	No connection



8.0 OUTLINE DIMENSION

1	2	3	4	5	6	7	8																																																						
DESIGN:(设计)		CHECKED:(检查)	APPROVED:(批准)	SPECIFICATION FOR BACKLIGHT 规格																																																									
Date:(日期)		2023.03.28	Page:(页数)	1/1	图纸视角:	CUSTOMER'S CODE:(客户型号)	EDITION:(版本号)																																																						
MODEL NO.:		FB090MFV600-A		EDITION:(版本号)		A01																																																							
环保要求: ☒ RoHS 2.0 ☐ REACH ☐ H/F																																																													
9点测试位置示意图: 测试仪器: BM-7, Distance=500±50mm; Field=1° 均一性要求: 80%Min/85%Typ 电路原理图: 3*13=39PCS																																																													
9.0 inch 1280XRGBX720 View All 电路原理图:																																																													
备注: 1. □ "重要尺寸", "()" "参考尺寸", "★" "安全特性", "▽" "特殊特性"; "▽"表示CPK管控项, CPK≥1.33, PPK≥1.67, 共 0 处; 2. 未标注公差尺寸按照±0.2, 未标注圆角按照R=0.2; 3. 符合环保要求; 4. 产品使用温度: -30~80℃; 储存温度: -30~85℃;																																																													
RA要求: ☒ 冷热冲击实验(-30℃(1小时)~80℃(1小时)10Cycles); ☒ 低温工作实验(-30° C±5° C 96H); ☒ 低温存储实验(-30° C±5° C 96H); ☒ 高温工作实验(80° C±5° C 96H); ☒ 高温存储实验(85° C±5° C 96H); ☒ 高温高湿实验(60° C±5° C/90RH 96H);																																																													
<table><thead><tr><th>项目</th><th>符号</th><th>最小值</th><th>典型值</th><th>最大值</th><th>单位</th><th>测定条件</th></tr><tr><th>Item</th><th>Symbol</th><th>min.</th><th>typ.</th><th>max.</th><th>Unit</th><th>Condition</th></tr></thead><tbody><tr><td rowspan="4">主屏 Main screen</td><td>中心点亮度 (DEN)</td><td>Lv</td><td>/</td><td>/</td><td>cd/m²</td><td>1. If=141 mA (恒定电流测试)</td></tr><tr><td>平均点亮度 (AVG)</td><td>Lv</td><td>500</td><td>550</td><td>cd/m²</td><td></td></tr><tr><td>均匀性 Uniformity</td><td>Avg</td><td>180%</td><td>85%</td><td>%</td><td></td></tr><tr><td>色度坐标(中心点) Colour Coordinate</td><td>X</td><td></td><td>TBD</td><td></td><td>1. Vr=5V/LED 2. The measurement instrument: IQC BM-7 3. Aperture: 1" to test 9 points Uniformity=min./max. 5. Aperture: 0.2" to test hotspot. hotspot=min./max. 6. Low If test: If=1mA/string, make sure LED is ON</td></tr><tr><td></td><td></td><td>Y</td><td></td><td>TBD</td><td></td><td></td></tr><tr><td colspan="2">正向电压</td><td>Forward Voltage</td><td>Vf</td><td>16.9</td><td>18</td><td>19.2</td><td>V</td></tr></tbody></table>								项目	符号	最小值	典型值	最大值	单位	测定条件	Item	Symbol	min.	typ.	max.	Unit	Condition	主屏 Main screen	中心点亮度 (DEN)	Lv	/	/	cd/m ²	1. If=141 mA (恒定电流测试)	平均点亮度 (AVG)	Lv	500	550	cd/m ²		均匀性 Uniformity	Avg	180%	85%	%		色度坐标(中心点) Colour Coordinate	X		TBD		1. Vr=5V/LED 2. The measurement instrument: IQC BM-7 3. Aperture: 1" to test 9 points Uniformity=min./max. 5. Aperture: 0.2" to test hotspot. hotspot=min./max. 6. Low If test: If=1mA/string, make sure LED is ON			Y		TBD			正向电压		Forward Voltage	Vf	16.9	18	19.2	V
项目	符号	最小值	典型值	最大值	单位	测定条件																																																							
Item	Symbol	min.	typ.	max.	Unit	Condition																																																							
主屏 Main screen	中心点亮度 (DEN)	Lv	/	/	cd/m ²	1. If=141 mA (恒定电流测试)																																																							
	平均点亮度 (AVG)	Lv	500	550	cd/m ²																																																								
	均匀性 Uniformity	Avg	180%	85%	%																																																								
	色度坐标(中心点) Colour Coordinate	X		TBD		1. Vr=5V/LED 2. The measurement instrument: IQC BM-7 3. Aperture: 1" to test 9 points Uniformity=min./max. 5. Aperture: 0.2" to test hotspot. hotspot=min./max. 6. Low If test: If=1mA/string, make sure LED is ON																																																							
		Y		TBD																																																									
正向电压		Forward Voltage	Vf	16.9	18	19.2	V																																																						
REV(标记) DATE (日期) DESCRIPTION (描述) Customer Name: 客户名称 check by: 确认 Approved by: 承认 Please Confirm This Drawing On/Before 请签回此图 Drawing NO. 开发版本号																																																													
1	2	3	4	5	6	7	8																																																						




9.0 Package Specification

9.1 Packing form

LCM Moudle	LCM Qty. in the box	Box size	Note
JWS090P8ALA39.V0	50 pcs/box		

9.2 Packing assembly drawing

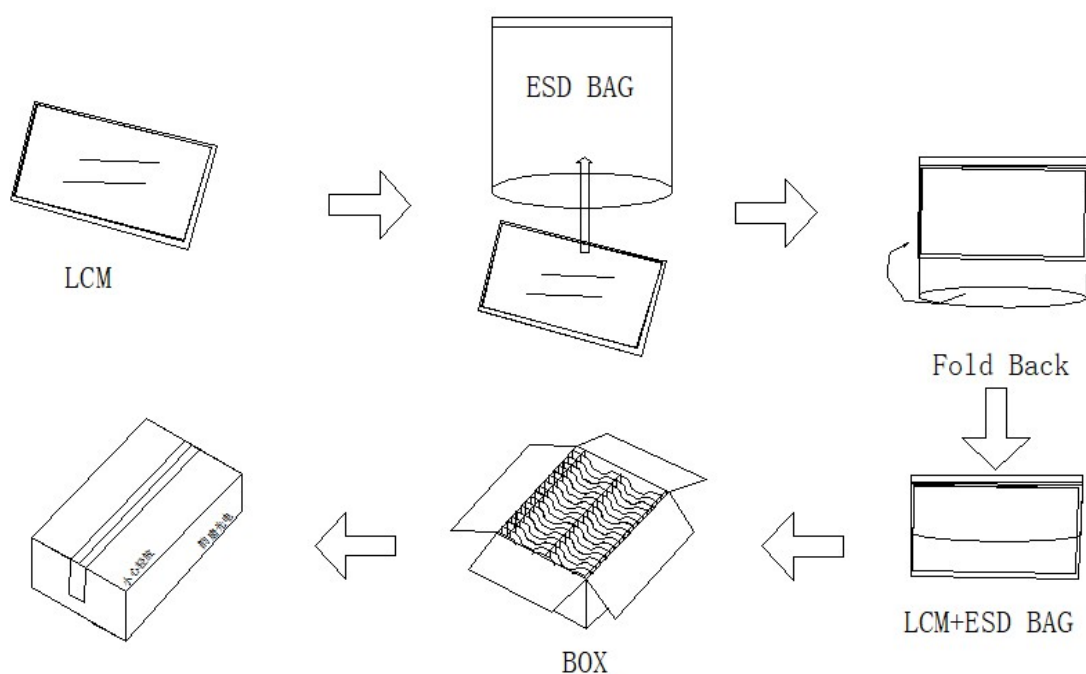

	Material	Notice
Box	Corrugated Paper Board	(AB Flute)
Partition/Pad	Corrugated Paper Board	(B Flute)
Corner Pad	Corrugated Paper Board	(AB Flute)
ESD bag	PE	



10.0 General precaution

10.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life threatening or otherwise catastrophic.

10.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. GM does not warrant the module, if customers disassemble or modify the module.

10.3 Breakage of LCD Panel

10.3.1. If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

10.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.

10.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

10.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

10.4 Electric Shock

10.4.1. Disconnect power supply before handling LCD module.

10.4.2. Do not pull or fold the LED cable.

10.4.3. Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

10.5 Absolute Maximum Ratings and Power Protection Circuit

10.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

10.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

10.5.3. It's recommended to employ protection circuit for power supply.

10.6 Operation

10.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

10.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

10.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.

10.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may cause deformation or color fading.

10.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzene or other adequate solvent.

10.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

10.8 Static Electricity

10.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

10.8.2. Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

10.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

10.10 Disposal

When disposing LCD module, obey the local environmental regulations.