
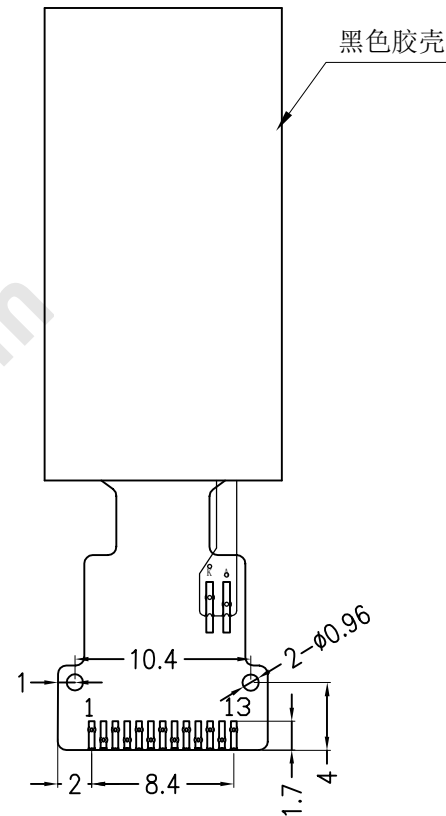
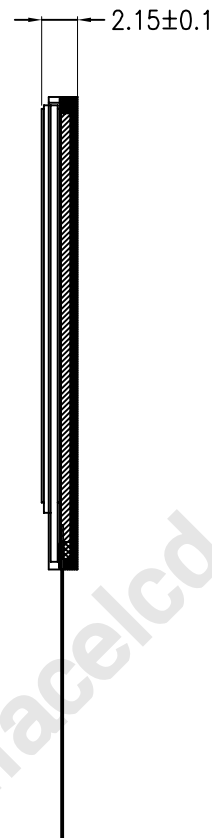


ROSH

Reversion	Discription	Date	Signed
01	First	2020.08.18	YP

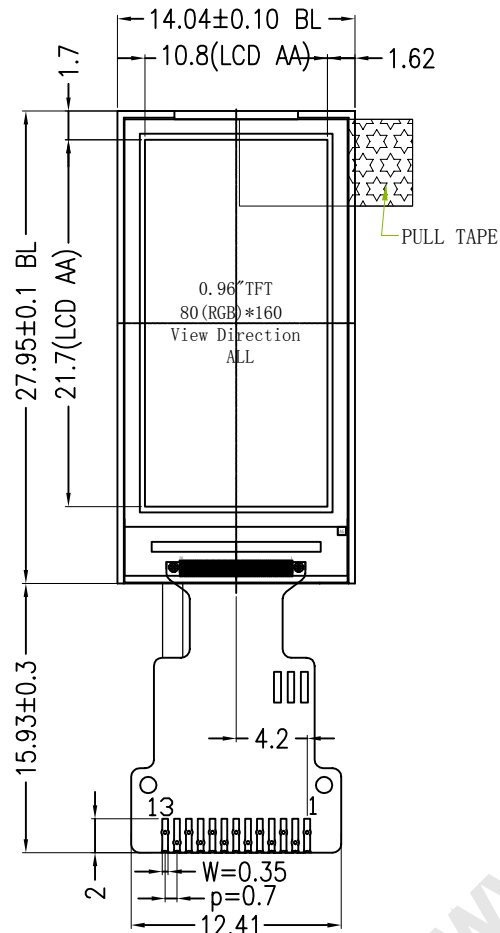

PIN	SYMBOL
1	NC
2	NC
3	SDA
4	SCL
5	RS
6	RESET
7	CS
8	GND
9	NC
10	VCC
11	LEDK
12	LEDA
13	GND

4线SPI



VF=3.2V; IF=15-20mA

LED CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE:0.96" TFT, TRANSMISSIVE
2. DRIVER IC:NV3022B
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 1 pcs White LED
5. INPUT CURRENT: VCC 2.8V(type)
6. OPERATING TEMP: -20° C~ +70° C
7. STORAGE TEMP: -30° C~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. RoHS COMPLIABLE



倍顯(香港)有限公司
Facelcd(HongKong) Limited

Customer Ref.	Model No.		Drawing Title		FB009DVS407-A			

Part No.	Approve		Material	Unmarked Tolerance	Unit	Scale	Page	

	Checked		LCM	±0.2	mm	--	1 of 1	
Drawing No.								
---	Draw	YP	Date	2020.08.18	Rev 00			

