

	Document Name	M121GNX2 R1 Product Specification			Page 1 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

Customer Approval Specification

To:

Product Name: M121GNX2 R1

Document Issue Date: 2016/08/08

Customer	InfoVision Optoelectronics
<u>SIGNATURE</u> _____ _____ _____ Please return 1 copy for your confirmation with your signature and comments.	<u>SIGNATURE</u> REVIEWED BY QA _____ PREPARED BY FAE _____

Note : 1. Please contact InfoVision Company before designing your product based on this product.
 2. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by IVO for any intellectual property claims or other problems that may result from application based on the module described herein.

FQ-7-30-0-009-03D

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 2 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

Revision	Date	Page	Old Description	New Description	Remark
00	2016/08/08	All	--	First issue.	--

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 3 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

CONTENTS

1.0	GENERAL DESCRIPTIONS.....	3
2.0	ABSOLUTE MAXIMUM RATINGS.....	5
3.0	OPTICAL CHARACTERISTICS	6
4.0	ELECTRICAL CHARACTERISTICS	10
5.0	MECHANICAL CHARACTERISTICS.....	16
6.0	RELIABILITY CONDITIONS.....	23
7.0	PACKAGE SPECIFICATION.....	24
8.0	LOT MARK	25
9.0	GENERAL PRECAUTION	26

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 4 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

1.0 General Descriptions

1.1 Introduction

The M121GNX2 is a Color Active Matrix Liquid Crystal Display with a back light system. The matrix uses a-Si Thin Film Transistor as a switching device. This TFT LCD has a 12.1 inch diagonally measured active display area with XGA resolution (1,024 horizontal by 768 vertical pixels array).

1.2 Features

- Supported XGA Resolution
- LVDS Interface
- Compatible with RoHS Standard


1.3 Product Summary

Items	Specifications	Unit
Screen Diagonal	12.1	inch
Active Area (H x V)	245.76X 184.32	mm
Number of Pixels (H x V)	1,024 x 768	-
Pixel Pitch (H x V)	0.2400 x 0.2400	mm
Pixel Arrangement	R.G.B. Vertical Stripe	-
Display Mode	Normally White	-
White Luminance	350 (Typ.)	cd /m ²
Contrast Ratio	800 (Typ.)	-
Response Time	16 (Typ.)	ms
Input Voltage	3.3 (Typ.)	V
Power Consumption	6.925 (Max.)	W
Weight	545 (Max.)	g
Outline Dimension (H x V x D)	279.0(Typ) x 209.0(Typ) x 9.0(Max) With PCB 279.0(Typ) x 209.0(Typ) x 6.3(Max) Without PCB	mm
Electrical Interface (Logic)	LVDS	-
Support Color	16.7M	-
NTSC	50 (Typ.)	%
Viewing Direction	6 o'clock	-
Surface Treatment	Anti-glare	-

IVO	Document Name	M121GNX2 R1 Product Specification			Page 5 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03


1.4 Functional Block Diagram

Figure 1 shows the functional block diagram of the LCD module.

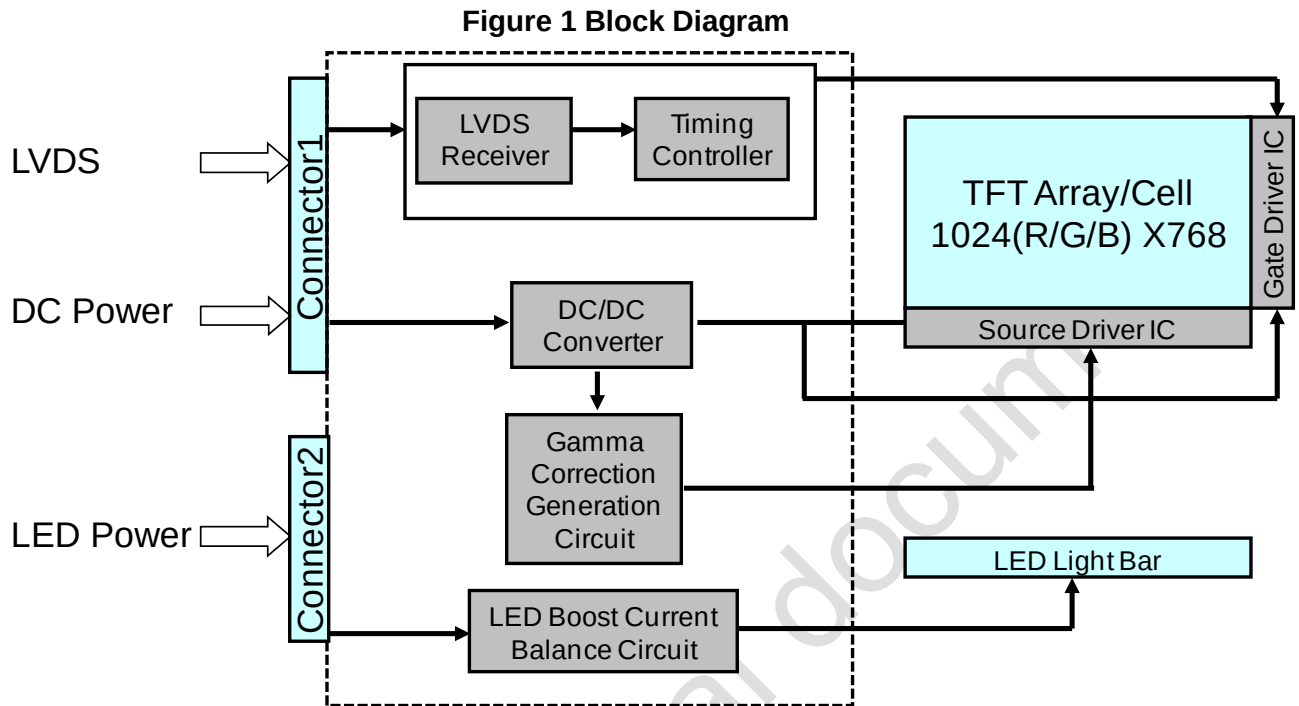

1.5 Pixel Mapping

Figure2 Pixel Mapping

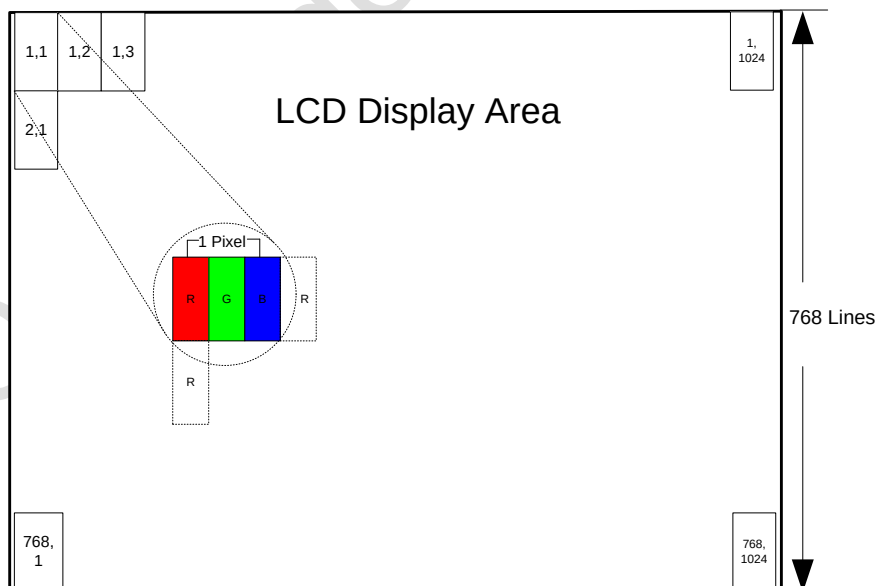

IVO	Document Name	M121GNX2 R1 Product Specification			Page 6 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

2.0 Absolute Maximum Ratings

Table 1 Electrical & Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Logic Supply Voltage	V_{DD}	-0.5	5.0	V	(1),(2),(3),(4)
Logic Input Signal Voltage	V_{Signal}	-0.3	3.3	V	
Operating Temperature	T_{gs}	-20	70	°C	
Storage Temperature	T_a	-30	80	°C	


Note (1) All the parameters specified in the table are absolute maximum rating values that may cause faulty operation or unrecoverable damage, if exceeded. It is recommended to follow the typical value.

Note (2) All the contents of electro-optical specifications and display fineness are guaranteed under Normal Conditions. All the display fineness should be inspected under normal conditions. Normal conditions are defined as follow: Temperature: 25°C, Humidity: 55± 10%RH.

Note (3) Unpredictable results may occur when it was used in extreme conditions. T_a = Ambient Temperature, T_{gs} = Glass Surface Temperature. All the display fineness should be inspected under normal conditions.

Note (4) Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be lower than 39°C, and no condensation of water. Besides, protect the module from static electricity.

Figure 3 Absolute Ratings of Environment of the LCD Module

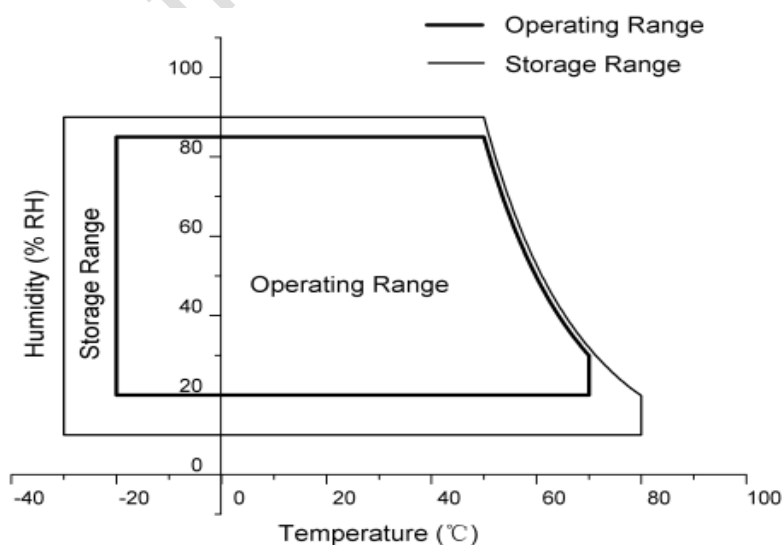

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 7 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

3.0 Optical Characteristics

The optical characteristics are measured under stable conditions as following notes.

Table 2 Optical Characteristics

Item	Conditions		Min.	Typ.	Max.	Unit	Note
Viewing Angle (CR>10)	Horizontal	θ_{x+}	70	80	-	degree	(1),(2),(3), (4)(8)
		θ_{x-}	70	80	-		
	Vertical	θ_{y+}	70	80	-		
		θ_{y-}	70	80	-		
Contrast Ratio	Center		720	800	-	-	(1),(2),(4) ,(8) $\theta_x=\theta_y=0^\circ$
Response Time	Rising + Falling		-	16	19	ms	(1),(2),(5) ,(8) $\theta_x=\theta_y=0^\circ$
Color Chromaticity (CIE1931)	Red	x	Typ. -0.03	0.644	Typ. +0.03	-	(1),(2), (3),(8) $\theta_x=\theta_y=0^\circ$
	Red	y		0.344		-	
	Green	x		0.310		-	
	Green	y		0.634		-	
	Blue	x		0.152		-	
	Blue	y		0.081		-	
	White	x	0.255	0.305	0.355	-	
	White	y	0.275	0.325	0.375	-	
NTSC	-		67	72	-	%	(1),(2),(3),(8) $\theta_x=\theta_y=0^\circ$
White Luminance	5 Points Average		315	350	-	cd/m ²	(1),(2),(6),(8) $\theta_x=\theta_y=0^\circ$
Luminance Uniformity	9 Points		75	80	-	%	(1),(2),(7),(8) $\theta_x=\theta_y=0^\circ$


InfoVision Optoelectronics (Kunshan) Co.,LTD.

IVO	Document Name	M121GNX2 R1 Product Specification			Page 8 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

Note (1) Measurement Setup:

The LCD module should be stabilized at given ambient temperature (25℃) for 30 minutes to avoid abrupt temperature changing during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 30 minutes in the windless room.

Figure 4 Measurement Setup

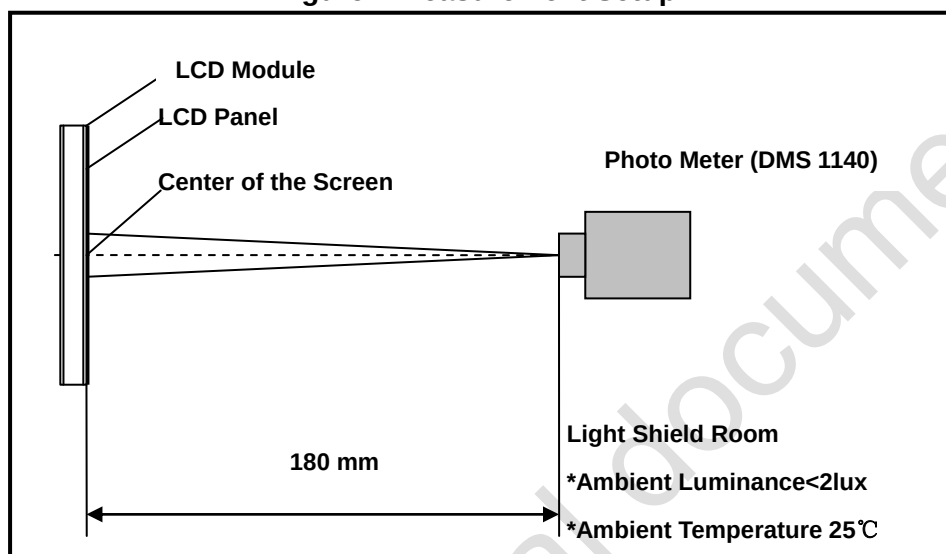


Note (2) The LED input parameter setting as:

I_LED: 240mA

PWM_LED: Duty 100 %

Note (3) Definition of Viewing Angle

Figure 5 Definition of Viewing Angle

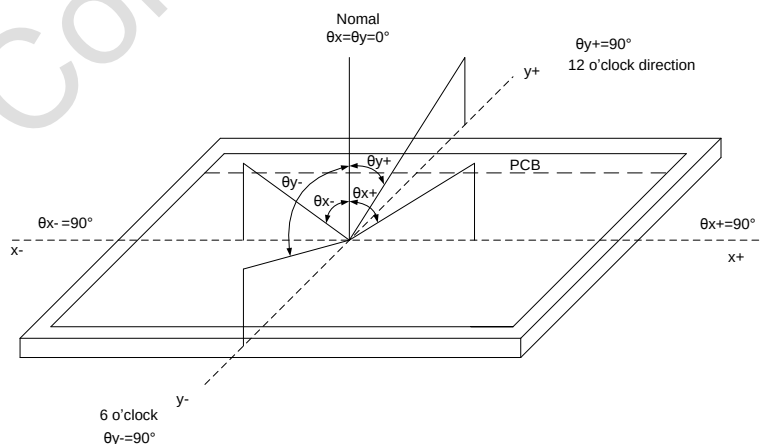

IVO	Document Name	M121GNX2 R1 Product Specification			Page 9 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

Note (4) Definition Of Contrast Ratio (CR)


The contrast ratio can be calculated by the following expression:

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$

L255: Luminance of gray level 255, L0: Luminance of gray level 0

Note (5) Definition Of Response Time (T_R , T_F)

Figure 6 Definition of Response Time

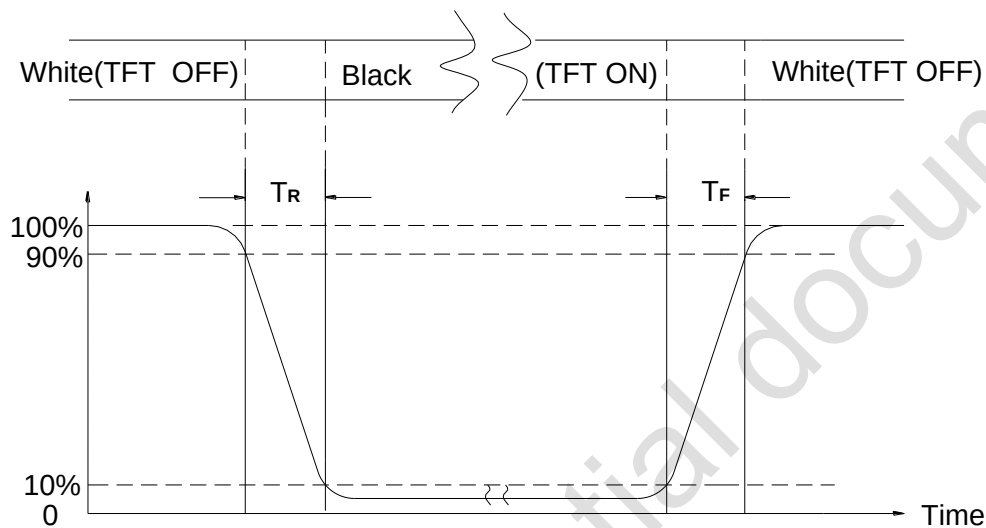


Note (6) Definition Of Luminance White

Measure the luminance of gray level 255 (Ref.: Active Area)

$$\text{Display Luminance} = (L_1 + L_2 + L_3 + L_4 + L_5) / 5$$

H—Active Area Width, V—Active Area Height, L—Luminance

Figure 7 Measurement Locations Of 5 Points

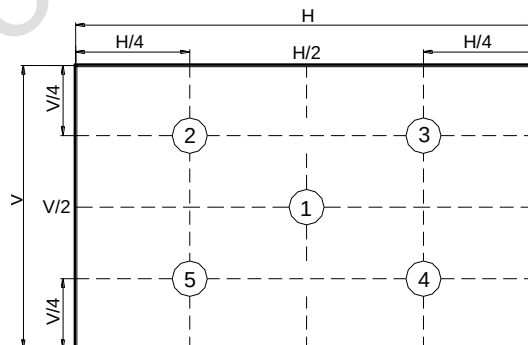

InfoVision Optoelectronics (Kunshan) Co.,LTD.

IVO	Document Name	M121GNX2 R1 Product Specification			Page 10 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03


Note (7) Definition Of Luminance Uniformity (Ref.: Active Area)

Measure the luminance of gray level 255 at 9 points

Luminance Uniformity= Min.(L1, L2, ... L9) / Max.(L1, L2, ... L9)

H—Active Area Width, V—Active Area Height, L—Luminance

Figure 8 Measurement Locations Of 9 Points

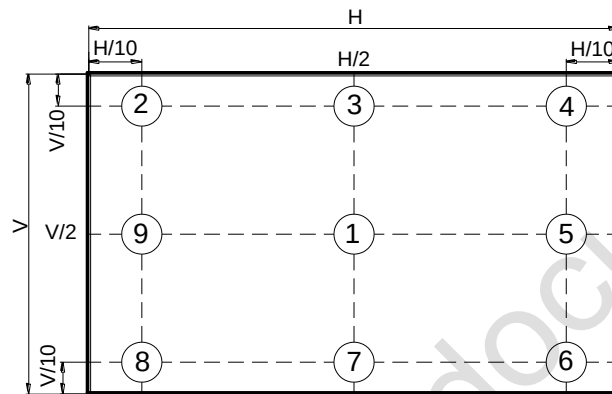

Note (8) All optical data based on IVO given system & nominal parameter & testing machine in this document.

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 11 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

4.0 Electrical Characteristics

4.1 Interface Connector

Table 3 Signal Connector Type

Item	Description
FPC Down Connector (20pin pitch=1.25mm)	PCB Jack Connector recommended model: MSB240420HE Manufactured by STM
	PIN IDE Connector model: P240420H

Table 4 Signal Connector Pin Assignment

Pin No.	Symbol	Description	Remarks
1	VDD	Power Supply, 3.3V (typical)	-
2	VDD	Power Supply, 3.3V (typical)	-
3	VSS	Ground	-
4	REV	Reverse Scan selection	-
5	Rin1-	-LVDS differential data input (R0-R5,G0)	-
6	Rin1+	+LVDS differential data input (R0-R5,G0)	-
7	VSS	Ground	-
8	Rin2-	-LVDS differential data input (G1-G5,B0-B1)	-
9	Rin2+	+LVDS differential data input (G1-G5,B0-B1)	-
10	VSS	Ground	-
11	Rin3-	-LVDS differential data input (B2-B5,HS,VS,DE)	-
12	Rin3+	+LVDS differential data input (B2-B5,HS,VS,DE)	-
13	VSS	Ground	-
14	ClkIN-	-LVDS differential clock input	-
15	ClkIN+	+LVDS differential clock input	-
16	GND	Ground	-
17	Rin4-	-LVDS differential data input (R6-R7,G6-G7,B6-B7)	-
18	Rin4+	+VDS differential data input (R6-R7,G6-G7,B6-B7)	-
19	SEL68	6/8 bits LVDS data input selection(H:8bit L/NC:6bit)	-
20	Bist	Internal use	-

InfoVision Optoelectronics (Kunshan) Co.,LTD.

IVO	Document Name	M121GNX2 R1 Product Specification			Page 12 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03


Table 5 LED Connector Name / Designation

Item	Description
Manufacturer / Type	PCB Jack Connector model: MSB24038P5A Manufactured by STM
Mating Receptacle / Type (Reference)	PIN IDE Connector model: P24038P5

Table 6 LED Connector Pin Assignment

Pin No.	Description	Remarks
1	VCC(12V input)	-
2	GND	-
3	On/Off(5V-ON,0V-OFF)	-
4	Dimming(PWM)	-
5	NC	-

Figure 9 LED Connector

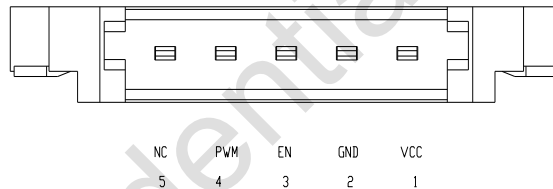

IVO	Document Name	M121GNX2 R1 Product Specification			Page 13 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

4.2 Signal Electrical Characteristics

4.2.1 Signal Electrical Characteristics For LVDS Receiver

The built-in LVDS receiver is compatible with (ANSI/TIA/TIA-644) standard.


Table 7 LVDS Receiver Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V_{th}	-	-	+100	mV	$V_{CM}=+1.2V$
Differential Input Low Threshold	V_{tl}	-100	-	-	mV	$V_{CM}=+1.2V$
Magnitude Differential Input Voltage	$ V_{ID} $	100	-	600	mV	-
Common Mode Voltage	V_{CM}	$ V_{ID} /2+0.6$	1.2	$1.8- V_{ID} /2$	V	-
Common Mode Voltage Offset	ΔV_{CM}	-	-	50	mV	$V_{CM}=+1.2V$

Note (1) Input signals shall be low or Hi- resistance state when VDD is off.

Note (2) All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

Figure 10 Voltage Definitions

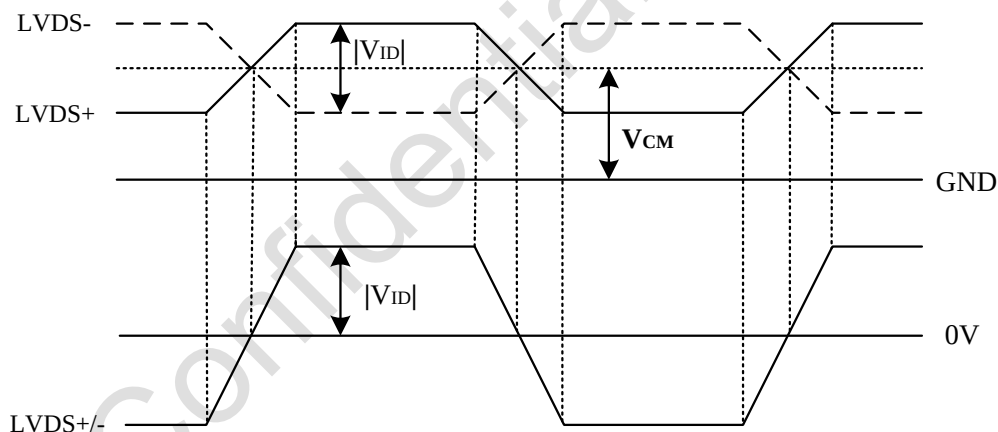

	Document Name	M121GNX2 R1 Product Specification			Page 14 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

Figure 11 Measurement System



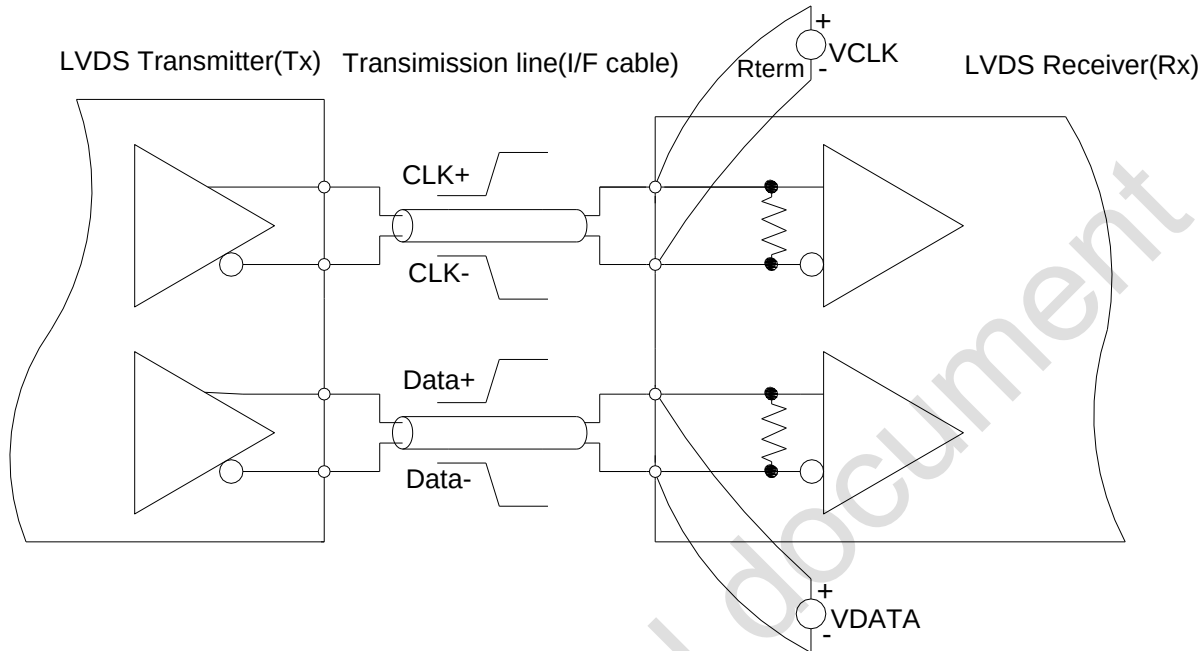


Figure 12 Date Mapping(8 Bit)

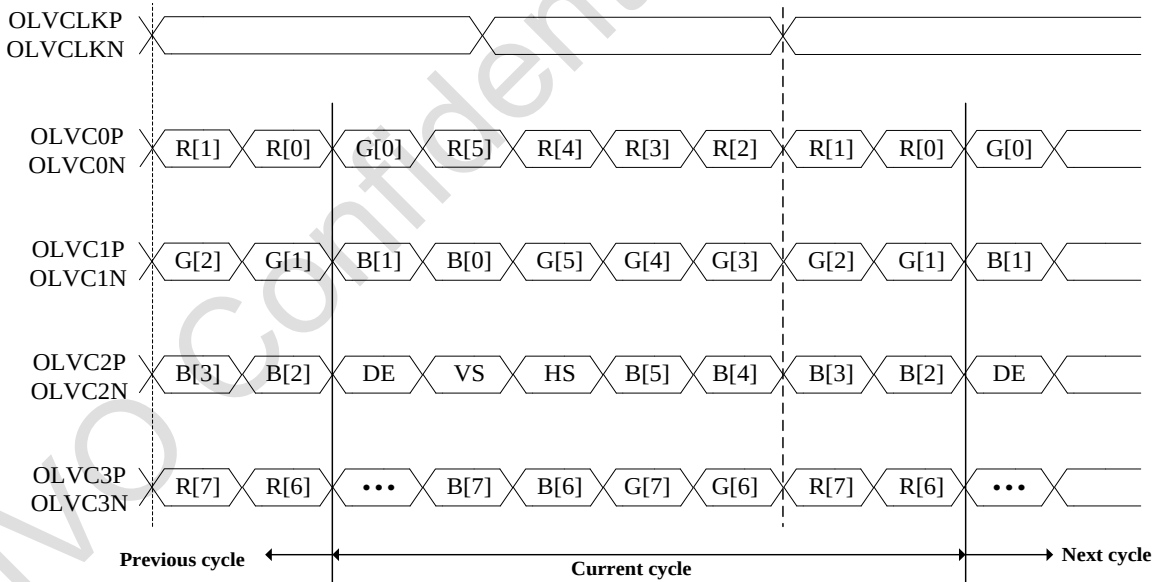

	Document Name	M121GNX2 R1 Product Specification			Page 15 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

Figure 13 Data Mapping(6 Bit)

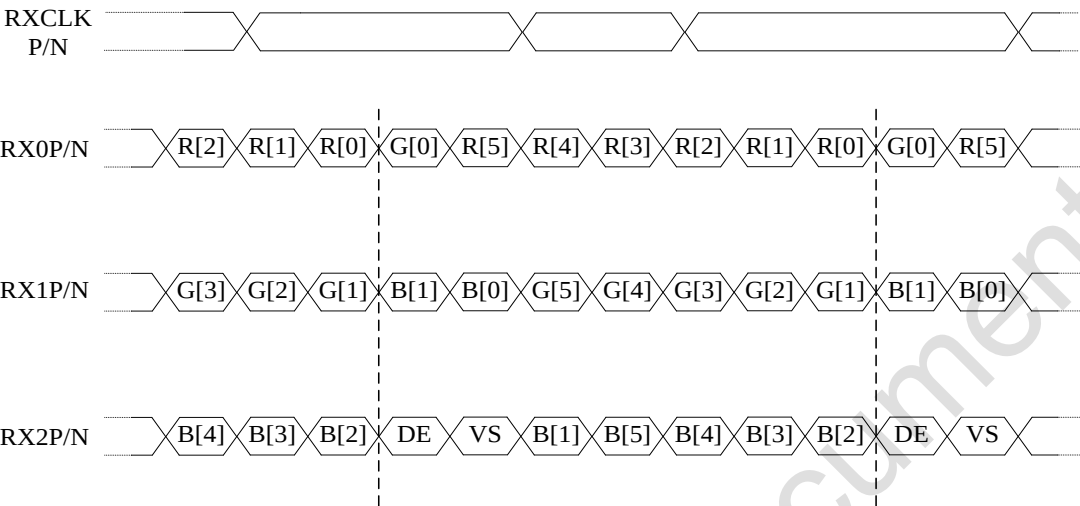


IVO	Document Name	M121GNX2 R1 Product Specification			Page 16 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

4.2.2 LVDS Receiver Internal Circuit

Figure 14 shows the internal block diagram of the LVDS receiver. This LCD module equips termination resistors for LVDS link.

Figure 14 LVDS Receiver Internal Circuit

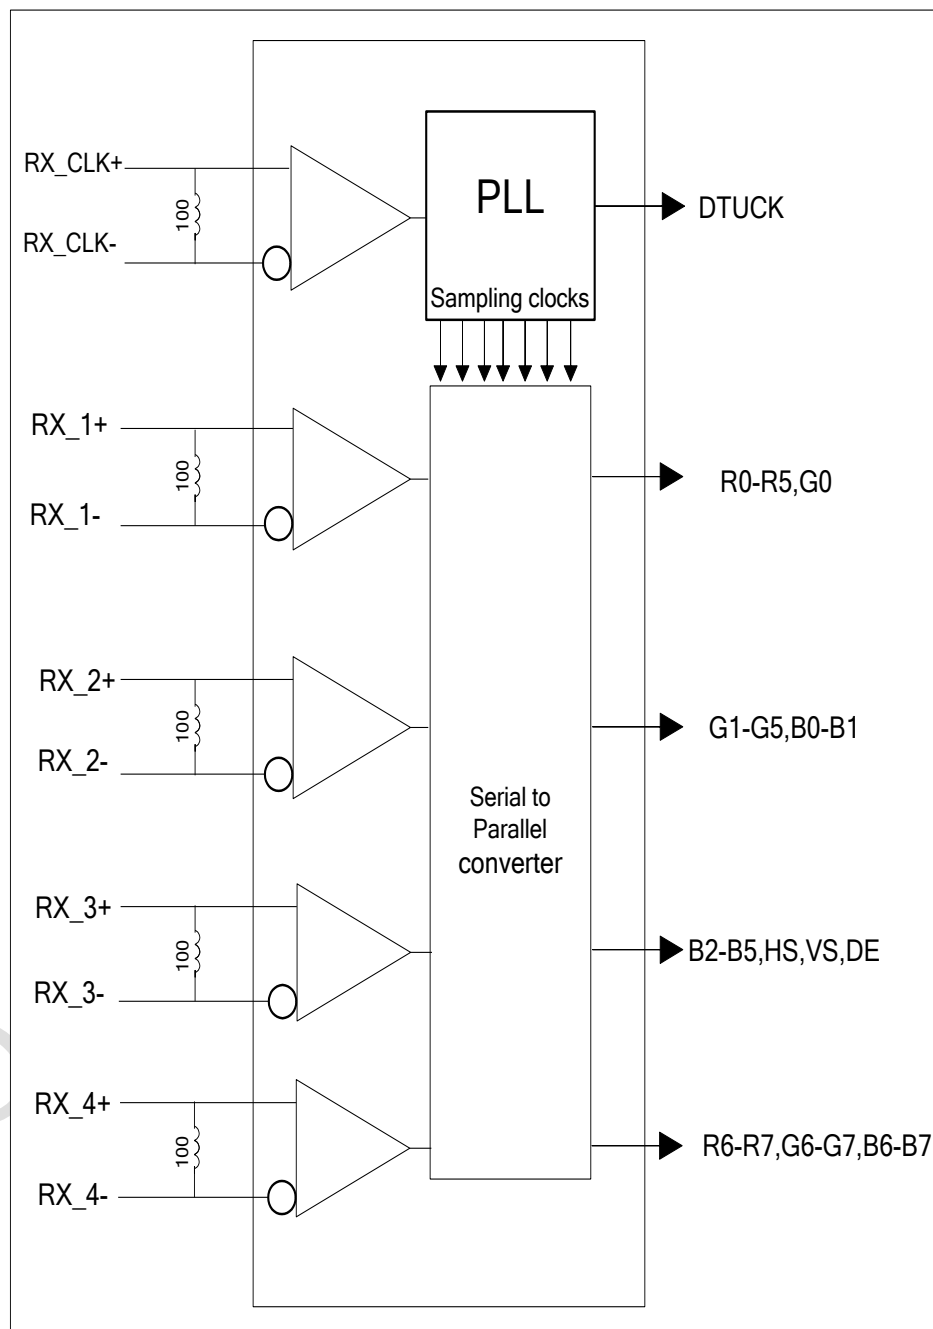

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 17 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

4.3 Interface Timings

Table 8 Interface Timings

Parameter	Symbol	Min.	Typ.	Max.	Unit
LVDS Clock Frequency	Fclk	50	65	80	MHz
H Total Time	HT	1100	1344	2047	Clocks
H Active Time	HA	-	1024	-	Clocks
V Total Time	VT	776	806	1023	Lines
V Active Time	VA	-	768	-	Lines
Frame Rate	FV	55	60	65	Hz

4.4 Input Power Specifications

Input power specifications are as follows.

Table 9 Input Power Specifications

Parameter		Symbol	Min.	Typ.	Max.	Unit	Note
System Power Supply							
LCD Drive Voltage (Logic)		V _{DD}	3.0	3.3	3.6	V	(1), (2)
VDD Current	Black Pattern	I _{DD}	-	-	0.27	A	(1), (3)
VDD Power Consumption	Black Pattern	P _{DD}	-	-	0.825	W	
Rush Current		I _{Rush}	-	-	3	A	(1), (4)
Allowable Logic/LCD Drive Ripple Voltage		V _{VDD-RP}	-	-	200	mV	(1)
LED Power Supply							
LED Input Voltage		V _{LED}	8	12	16	V	(1), (2),(9)
LED Power Consumption		P _{LED}	-	-	6.1	W	(1), (5), (9)
LED Forward Voltage		V _F	2.8	3.3	3.6	V	(1), (2)
LED Forward Current		I _F	-	60	-	mA	
PWM Signal Voltage	High	V _{PWM}	2.5	3.3	5.5	V	
	Low		-	0	0.5		
LED Enable Voltage	High	V _{LED_EN}	2	3.3	5.5	V	
	Low		-	0	0.5		
Input PWM Frequency		F _{PWM}	200	-	2,0000	Hz	(1), (2),(6)
Duty Ratio		PWM	1	-	100	%	(1), (7)
LED Life Time		LT	30,000	-	-	Hours	(1),(8)

InfoVision Optoelectronics (Kunshan) Co.,LTD.

IVO	Document Name	M121GNX2 R1 Product Specification			Page 18 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03


Note (1) All of the specifications are guaranteed under normal conditions. Normal conditions are defined as follow: Temperature: 25°C, Humidity: 55± 10%RH.

Note (2) All of the absolute maximum ratings specified in the table, if exceeded, may cause faulty operation or unrecoverable damage. It is recommended to follow the typical value.

Note (3) The specified V_{DD} current and power consumption are measured under the $V_{DD} = 3.3\text{ V}$, $F_V = 60\text{ Hz}$ condition and Black pattern.

Note (4) The figures below is the measuring condition of V_{DD} .Rush current can be measured when T_{RUSH} is 0.5 ms.

Figure 15 V_{DD} Rising Time

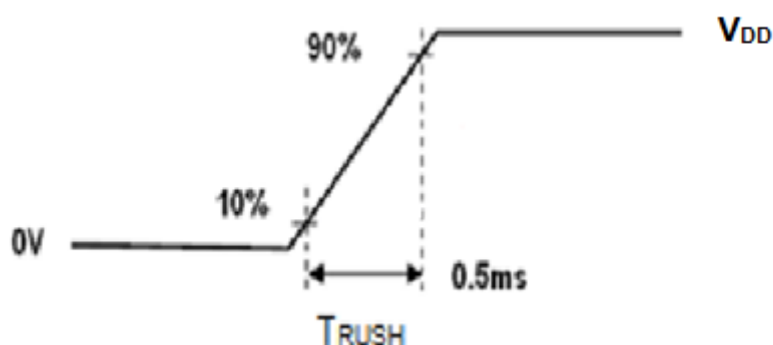

Note (5) The power consumption of LED Driver are under the $V_{LED} = 12.0\text{V}$, Dimming of Max luminance.

Note (6) Although acceptable range as defined, the dimming ratio is not effective at all conditions. The PWM frequency should be fixed and stable for more consistent luminance control at any specific level desired.

Note (7) The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.

Note (8) The life time is determined as the sum of the lighting time till the luminance of LCD at the typical LED current reducing to 50% of the minimum value under normal operating condition.

	Document Name	M121GNX2 R1 Product Specification			Page 19 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

4.5 Power ON/OFF Sequence

Interface signals are also shown in the chart. Signals from any system shall be Hi- resistance state or low level when VDD voltage is off.

Figure 17 Power Sequence


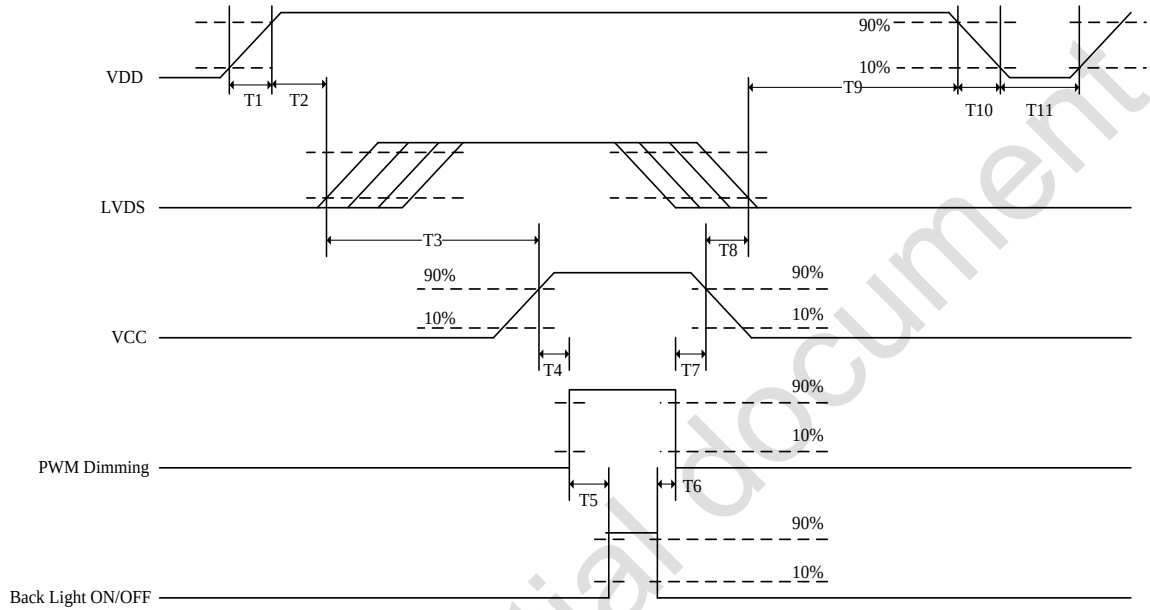


Table 10 Power Sequencing Requirements

Parameter	Unit	min	typ	max
T1	ms	0.5	-	10
T2	ms	30	40	50
T3	ms	200	-	-
T4	ms	10	-	-
T5	ms	10	-	-
T6	ms	0	-	-
T7	ms	10	-	-
T8	ms	100	-	-
T9	ms	0	16	50
T10	ms	-	-	10
T11	ms	1000	-	-

IVO	Document Name	M121GNX2 R1 Product Specification			Page 21 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

Figure 20 Reference Outline Drawing (Back Side)

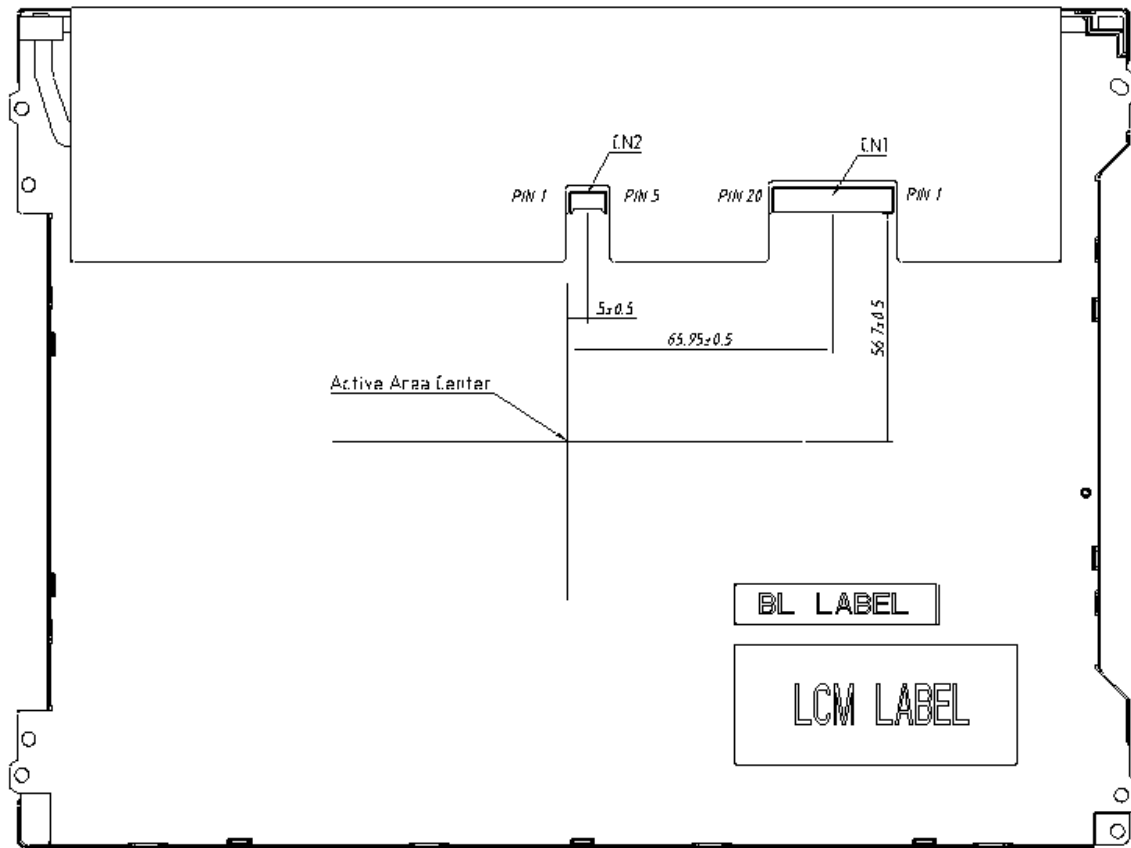

InfoVision Optoelectronics (Kunshan) Co.,LTD.


IVO	Document Name	M121GNX2 R1 Product Specification			Page 22 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

5.2 Dimension Specifications

Table 11 Module Dimension Specifications

Item		Min.	Typ.	Max.	Units
Width		278.5	279.0	279.5	mm
Height		208.5	209.0	209.5	mm
Thickness	Without PCBA	5.7	6.0	6.3	mm
	With PCBA	-	-	9.0	
Weight		-	518.7	545	g
BM : a-b & c-d		≤1.0			mm

Figure 21 BM Area

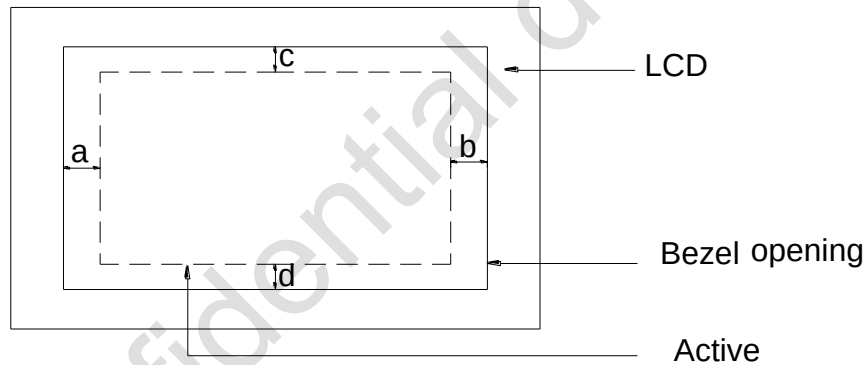

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 23 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

6.0 Reliability Conditions

Table 12 Reliability Condition

Item		Package	Test Conditions		Note
High Temperature/High Humidity Operating Test		Module	T _{gs} =50℃, 85%RH, 500 hours		(1),(2), (3),(4)
High Temperature Operating Test		Module	T _{gs} =70℃, 500 hours		
Low Temperature Operating Test		Module	T _a =-20℃, 500 hours		
High Temperature Storage Test		Module	T _a =80℃, 500 hours		(1),(3),(4)
Low Temperature Storage Test		Module	T _a =-30℃, 500 hours		
Shock Non-operating Test		Module	3 shock in each direction Peak acceleration:981m/s2 Half Sine Wave; 6ms		(1),(3),(5)
Vibration Non-operating Test		Module	1.5G , 10~500 Hz , x、y、z each axis/1hour.		
ESD Test	Operating	Module	Contact	±8KV, 150pF(330Ohm)	(1),(2),(6)
			Air	±15KV, 150pF(330Ohm)	
	non-operating		Contact	±10KV, 150pF(330Ohm)	(1),(6)
			Air	±20KV, 150pF(330Ohm)	

Note (1) A sample can only have one test. Outward appearance, image quality and optical data can only be checked at normal conditions according to the IVO document before reliable test. Only check the function of the module after reliability test.

Note (2) The setting of electrical parameters should follow the typical value before reliability test.

Note (3) During the test, it is unaccepted to have condensate water remains. Besides, protect the module from static electricity.

Note (4) The sample must be released for 24 hours under normal conditions before judging.

Furthermore, all the judgment must be made under normal conditions. Normal conditions are defined as follow: Temperature: 25°C , Humidity: $55\pm 10\%\text{RH}$. T_a = Ambient Temperature, T_{gs} = Glass Surface Temperature.


Note (5) The module should be fixed firmly in order to avoid twisting and bending.

Note (6) It could be regarded as pass, when the module recovers from function fault caused by ESD after resetting.

	Document Name	M121GNX2 R1 Product Specification			Page 24 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

7.0 Package Specification


Figure 23 Packing Method

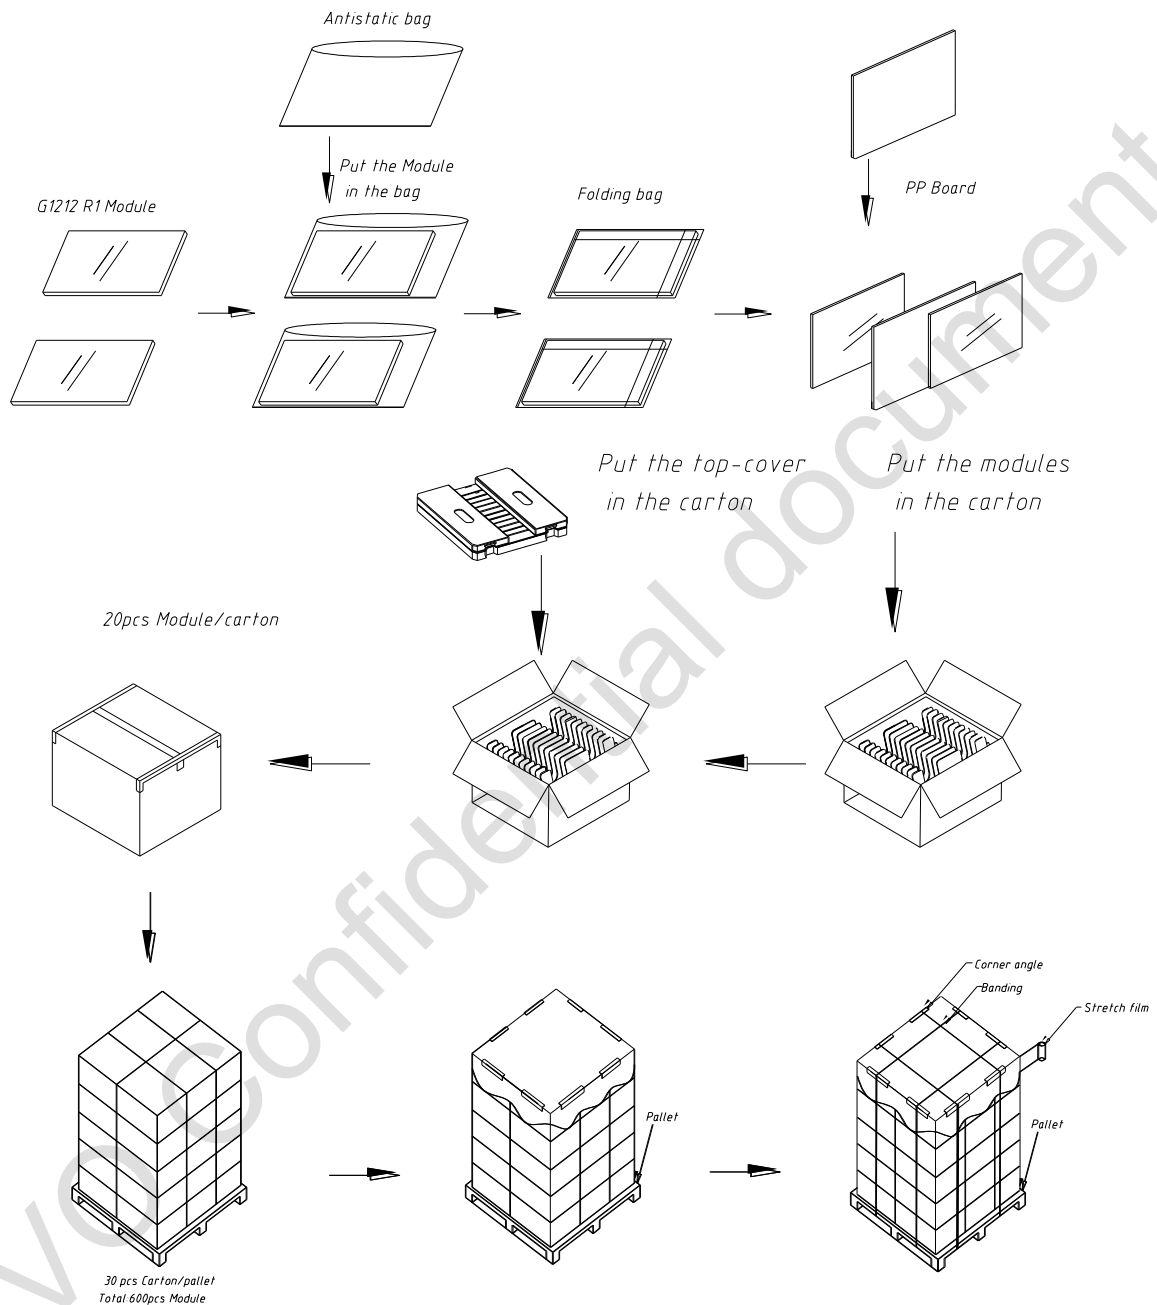

InfoVision Optoelectronics (Kunshan) Co.,LTD.

IVO	Document Name	M121GNX2 R1 Product Specification			Page 25 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

8.0 Lot Mark

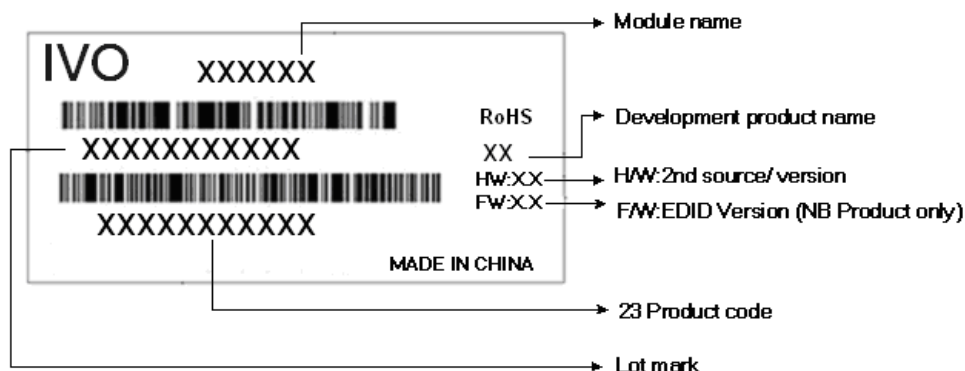

13.0 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

code 1,2,4,5,6,7,8,9,10,11,16: IVO internal flow control code.

code 3: Production location.

code 12: Production year.

code 13: Production month.

code 14,15: Production date.

code 17,18,19,20: Serial number.

Note (1) Production Year

Year	2,006	2,007	2,008	2,009	2,010	2,011	2,012	2,013	2,014	2,015
Mark	6	7	8	9	A	B	C	D	E	F

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

13.1 23 Product Barcode

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----

code 1,2: Manufacture District.

code 3,4,5,6,7: IVO internal module name.

code 8,9,10,13,16: IVO internal flow control code.

code 11,12: Cell location Suzhou defined as "SZ".

code 14,15: Module line kunshan defined as "KS".

code 17,18,19 : Year, Month, Day Refer to Note(1) and Note(2) of Lot Mark.

code 20~23 : Serial Number.

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 26 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

9.0 General Precaution

9.1 Using Restriction

This product is not authorized for using in life supporting systems, aircraft navigation control systems, military systems and any other appliance where performance failure could be life-threatening or lead to be catastrophic.

9.2 Operation Precaution

(1)The LCD product should be operated under normal conditions.

Normal conditions are defined as below:

Temperature: 25℃

Humidity: 55±10%

Display pattern: continually changing pattern (Not stationary)

(2) Brightness and response time depend on the temperature. (It needs more time to reach normal brightness in low temperature.)

(3) It is necessary for you to pay attention to condensation when the ambient temperature drops suddenly. Condensate water would damage the polarizer and electrical contacted parts of the module. Besides, smear or spot will remain after condensate water evaporating.

(4) If the absolute maximum rating value was exceeded, it may damage the module.

(5) Do not adjust the variable resistor located on the module.

(6) Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding may be important to minimize the interference.

(7) Image sticking may occur when the module displayed the same pattern for long time.

(8) Do not connect or disconnect the module in the “power on” condition. Power supply should always be turned on/off by the “power on/off sequence”

(9) Ultra-violet ray filter is necessary for outdoor operation.

9.3 Mounting Precaution

(1) All the operators should be electrically grounded and with Ion-blown equipment turning on when mounting or handling. Dressing finger-stalls out of the gloves is important for keeping the panel clean during the incoming inspection and the process of assembly.

(2) It is unacceptable that the material of cover case contains acetic or chloric. Besides, any other material that could generate corrosive gas or cause circuit break by electro-chemical reaction is not desirable.

(3) The case on which a module is mounted should have sufficient strength so that external force is not transmitted to the module directly.

(4) It is obvious that you should adopt radiation structure to satisfy the temperature specification.

(5) So as to acquire higher luminance, the cable between the back light and the inverter of the power supply should be connected directly with a minimize length.

(6) It should be attached to the system tightly by using all holes for mounting, when the module is assembled. Be careful not to apply uneven force to the module, especially to the PCB on the back.

InfoVision Optoelectronics (Kunshan) Co.,LTD.

	Document Name	M121GNX2 R1 Product Specification			Page 27 of 27	
	Document No.		Made/Revised Date	2016/08/08	Ver.	03

- (7) A transparent protective film needs to be attached to the surface of the module.
- (8) Do not press or scratch the polarizer exposed with anything harder than HB pencil lead. In addition, don't touch the pin exposed with bare hands directly.
- (9) Clean the polarizer gently with absorbent cotton or soft cloth when it is dirty.
- (10) Wipe off saliva or water droplet as soon as possible. Otherwise, it may cause deformation and fading of color.
- (11) Desirable cleaners are IPA (Isopropyl Alcohol) or hexane. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (12) Do not disassemble or modify the module. It may damage sensitive parts in the LCD module, and cause scratches or dust remains. IVO does not warrant the module, if you disassemble or modify the module.

9.4 Handling Precaution

- (1) Static electricity will generate between the film and polarizer, when the protection film is peeled off. It should be peeled off slowly and carefully by operators who are electrically grounded and with Ion-blown equipment turning on. Besides, it is recommended to peel off the film from the bonding area.
- (2) The protection film is attached to the polarizer with a small amount of glue. When the module with protection film attached is stored for a long time, a little glue may remain after peeling.
- (3) If the liquid crystal material leaks from the panel, keep it away from the eyes and mouth. In case of contact with hands, legs or clothes, it must be clean with soap thoroughly.

9.5 Storage Precaution

When storing modules as spares for long time, the following precautions must be executed.

- (1) Store them in a dark place. Do not expose to sunlight or fluorescent light. Keep the temperature between 5℃ and 35℃ at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- (3) It is recommended to use it in a short-time period, after it's unpacked. Otherwise, we would not guarantee the quality.

9.6 Others

When disposing LCD module, obey the local environmental regulations.