
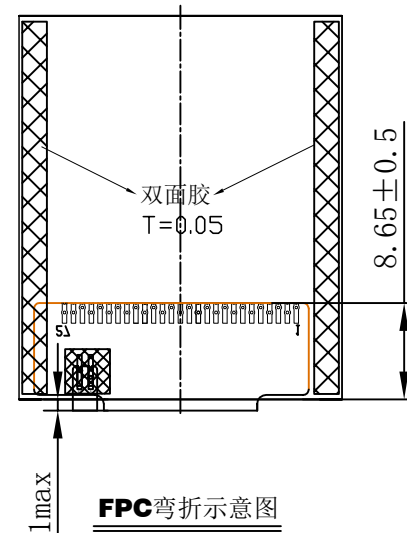
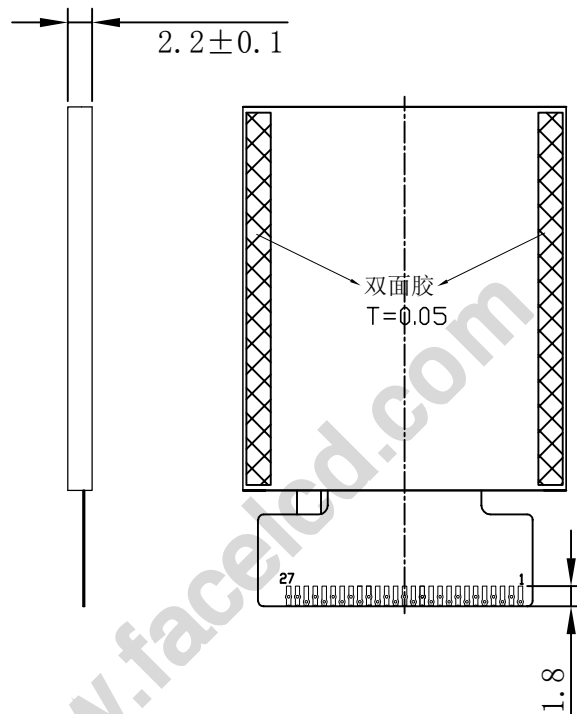


ROSH


Reversion	Discription	Date	Signed
01	First	2021.06.15	YP

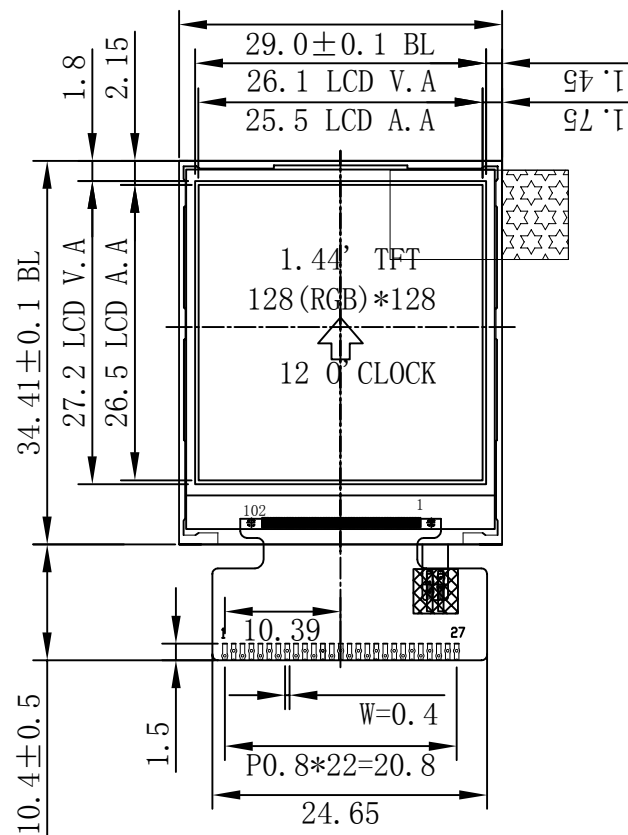

PIN	Symbol
1	VDD
2	GND
3	NC
4	TE-NC
5	CS
6	RS
7	RD
8	WR
9	RSTB
10	D0
11	NC
12	D1
13	NC
14	D2
15	NC
16	D3
17	NC
18	D4
19	NC
20	D5
21	NC
22	D6
23	NC
24	D7
25	NC
26	LEDK
27	LEDA

NOTES:

1. DISPLAY TYPE: 1.44" TFT, TRANSMISSIVE
 2. DRIVER IC:ST7735S
 3. VIEWING DIRECTION: 12 O' CLOCK
 4. BACKLIGHT: 2 pcs White LED
 5. INPUT CURRENT: VCC 3.2V(type)
 6. OPERATING TEMP: -20° C~ +70° C
 7. STORAGE TEMP: -30° C~ +80° C
 8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
- RoHS COMPLIABLE



倍顯(香港)有限公司 Facelcd(HongKong) Limited							
Customer Ref.	Model No.	Drawing Title		FB014DSS307-A			
Part No.	Approve	Material	Unmarked Tolerance	Unit	Scale	Page	
Drawing No.	Checked	LCM	±0.2	mm	--	1 of 1	
	Draw	YP	Date	2021.06.15	Rev 00		